

AD-A106 172

BLACK AND VEATCH KANSAS CITY MO

NATIONAL DAM SAFETY PROGRAM. HARRISONVILLE CITY LAKE DAM (MO 20--ETC(U)

F/G 13/13  
APR 79 P R ZAMAN, E R BURTON, H L CALLAHAN

DACW43-79-C-0040  
NL

UNCLASSIFIED

10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

AD A106172

**LEVEL II**

①

**MISSOURI-KANSAS CITY BASIN**

**HARRISONVILLE CITY LAKE DAM**

**CASS COUNTY, MISSOURI**

**MO 20077**

**DTIC  
ELECTE  
S OCT 27 1981 D  
E**

**PHASE 1 INSPECTION REPORT  
NATIONAL DAM SAFETY INSPECTION**



**United States Army  
Corps of Engineers**  
...Serving the Army  
...Serving the Nation

**St. Louis District**

**FILE COPY**

**PREPARED BY: U.S. ARMY ENGINEER DISTRICT, ST. LOUIS**

**FOR: STATE OF MISSOURI**

This document has been approved  
for public release and sale; its  
distribution is unlimited.

**APRIL 1979**

**81 10 26 084**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
	AD-A106	172
4. TITLE (and Subtitle) Phase I Dam Inspection Report National Dam Safety Program Harrisonville City Lake Dam (MO 20077) Cass County, Missouri		5. TYPE OF REPORT & PERIOD COVERED Final Report
7. AUTHOR(s) Black & Veatch, Consulting Engineers		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Engineer District, St. Louis Dam Inventory and Inspection Section, LMSED-PD 210 Tucker Blvd., North, St. Louis, Mo. 63101		8. CONTRACT OR GRANT NUMBER(s) DACW43-79-C-0040
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Engineer District, St. Louis Dam Inventory and Inspection Section, LMSED-PD 210 Tucker Blvd., North, St. Louis, Mo. 63101		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE April 1979
		13. NUMBER OF PAGES Approximately 45
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) National Dam Safety Program, Harrisonville City Lake Dam (MO 20077), Missouri - Kansas City Basin, Cass County, Missouri. Phase I Inspection Report.		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Dam Safety, Lake, Dam Inspection, Private Dams		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report was prepared under the National Program of Inspection of Non-Federal Dams. This report assesses the general condition of the dam with respect to safety, based on available data and on visual inspection, to determine if the dam poses hazards to human life or property.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

# **MISSOURI-KANSAS CITY BASIN**

**HARRISONVILLE CITY LAKE DAM**

**CASS COUNTY, MISSOURI**

**MO 20077**

## **PHASE 1 INSPECTION REPORT NATIONAL DAM SAFETY INSPECTION**



**United States Army  
Corps of Engineers**

*... Serving the Army  
... Serving the Nation*

**St. Louis District**

**PREPARED BY: U.S. ARMY ENGINEER DISTRICT, ST. LOUIS**

**FOR: STATE OF MISSOURI**

**APRIL 1979**



DEPARTMENT OF THE ARMY  
ST. LOUIS DISTRICT, CORPS OF ENGINEERS  
210 NORTH 12TH STREET  
ST. LOUIS, MISSOURI 63101

IN REPLY REFER TO

SUBJECT: Harrisonville City Lake Dam, Missouri ID No. 20077

This report presents the results of field inspection and evaluation of the Harrisonville City Lake Dam. It was prepared under the National Program of Inspection of Non-Federal Dams.

SUBMITTED BY:

SIGNED

Chief, Engineering Division

20 SEP 1979

Date

APPROVED BY:

SIGNED

Colonel, CE, District Engineer

20 SEP 1979

Date

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

HARRISONVILLE CITY LAKE DAM  
CASS COUNTY, MISSOURI

MISSOURI INVENTORY NO. 20077

PHASE I INSPECTION REPORT  
NATIONAL DAM SAFETY PROGRAM

PREPARED BY:

BLACK & VEATCH  
CONSULTING ENGINEERS  
KANSAS CITY, MISSOURI

UNDER DIRECTION OF  
ST. LOUIS DISTRICT CORPS OF ENGINEERS  
FOR  
GOVERNOR OF MISSOURI

APRIL 1979

PHASE I REPORT  
NATIONAL DAM SAFETY PROGRAM

Name of Dam	Harrisonville City Lake Dam
State Located	Missouri
County Located	Cass County
Stream	Tributary to Big Creek
Date of Inspection	26 April 1979

Harrisonville City Lake Dam was inspected by a team of engineers from Black & Veatch, Consulting Engineers for the St. Louis District, Corps of Engineers. The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and visual inspection, in order to determine if the dam poses hazards to human life or property.

The guidelines used in the assessment were furnished by the Department of the Army, Office of the Chief of Engineers and developed with the help of several Federal and state agencies, professional engineering organizations, and private engineers. Based on these guidelines, this dam is classified as an intermediate size dam with a high downstream hazard potential. According to the St. Louis District, Corps of Engineers, failure would threaten the life and property of approximately eleven families and six farm buildings downstream of the dam and would potentially cause appreciable damage to the Missouri Pacific Railroad, the Chicago and Rock Island Railroad, State Highway 7, and one improved road crossing within the estimated damage zone which extends approximately five miles downstream of the dam.

Our inspection and evaluation indicates the spillway does not meet the criteria set forth in the guidelines for a dam having the above size and hazard potential. The spillway will not pass the probable maximum flood without overtopping but will pass 85 percent of the probable maximum flood, which is greater than the estimated 100-year flood. The spillway design flood recommended by the guidelines is 100 percent of the probable maximum flood. The probable maximum flood is defined as the flood discharge that may be expected from the most severe combination of critical meteorologic and hydrologic conditions that are reasonably possible in the region.

The only significant deficiency visually observed by the inspection team was erosion of the upstream face of the embankment due to poor gradation of the riprap. Other deficiencies observed include erosion in the berm downstream of the embankment, small trees on the upstream face, minor seepage in the right abutment, spalling of concrete in the spillway

discharge structure, and erosion around the discharge structure. Seepage and complete stability analyses required by the guidelines were not readily available.

There were no observed deficiencies or conditions existing at the time of the inspection which indicated an immediate safety hazard. Future corrective action and regular maintenance will be required to correct or control the described deficiencies. A detailed report discussing each of these deficiencies is attached.

Paul R. Zaman  
Paul R. Zaman, PE  
Illinois 62-29261

Edwin R. Burton  
Edwin R. Burton, PE  
Missouri E-10137

Harry L. Callahan  
Harry L. Callahan, Partner  
Black & Veatch



OVERVIEW OF LAKE AND DAM

PHASE I INSPECTION REPORT  
NATIONAL DAM SAFETY PROGRAM  
HARRISONVILLE CITY LAKE DAM

TABLE OF CONTENTS

<u>Paragraph No.</u>	<u>Title</u>	<u>Page No.</u>
SECTION 1 - PROJECT INFORMATION		
1.1	General	1
1.2	Description of Project	1
1.3	Pertinent Data	3
SECTION 2 - ENGINEERING DATA		
2.1	Design	6
2.2	Construction	6
2.3	Operation	6
2.4	Evaluation	6
2.5	Geology	7
SECTION 3 - VISUAL INSPECTION		
3.1	Findings	8
3.2	Evaluation	9
SECTION 4 - OPERATIONAL PROCEDURES		
4.1	Procedures	11
4.2	Maintenance of Dam	11
4.3	Maintenance of Operating Facilities	11
4.4	Description of Any Warning System in Effect	11
4.5	Evaluation	11
SECTION 5 - HYDRAULIC/HYDROLOGIC		
5.1	Evaluation of Features	12
SECTION 6 - STRUCTURAL STABILITY		
6.1	Evaluation of Structural Stability	14
SECTION 7 - ASSESSMENT/REMEDIAL MEASURES		
7.1	Dam Assessment	16
7.2	Remedial Measures	17

TABLE OF CONTENTS (Cont'd)

LIST OF PLATES

<u>Plate No.</u>	<u>Title</u>
1	Location Map
2	Vicinity Topography
3	Plan
4	Typical Section
5	Typical Sections
6	Spillway Sections
7	Photo Index

LIST OF PHOTOGRAPHS

<u>Photo No.</u>	<u>Title</u>
1	Upstream Face of Dam and Shaft Spillway (Looking North)
2	Crest of Dam (Looking North)
3	Downstream Face of Dam (Looking North)
4	Riprap on Upstream Face (Looking South)
5	Erosion of Riprap on Upstream Face (Looking North)
6	Exposure of Embankment and Erosion of Riprap on Upstream Face
7	Crest of Dam (Looking South)
8	Downstream Face of Dam (Looking South)
9	Erosion Along Toe of Dam (Looking South)
10	Interior Drain Outlet with Flap Gate
11	Shaft Spillway Structure (Looking Upstream)

<u>Photo No.</u>	<u>Title</u>
12	Shaft Spillway Discharge Structure (Looking Upstream)
13	Seepage from Embankment and Spalling of Concrete on Wingwall
14	Erosion Along Wingwall of Spillway Discharge Structure
15	Shaft Spillway Discharge Structure (Looking Downstream)
16	Spillway Channel (Looking Downstream)
17	Emergency Spillway (Looking Downstream)
18	Emergency Spillway Approach
19	Emergency Spillway Crest (Looking Upstream)
20	Emergency Spillway Discharge Channel (Looking Downstream)

#### APPENDIX

##### Appendix A - Hydrologic Computations

## SECTION 1 - PROJECT INFORMATION

### 1.1 GENERAL

a. Authority. The National Dam Inspection Act, Public Law 92-367, authorized the Secretary of the Army, through the Corps of Engineers, to initiate a program of safety inspection of dams throughout the United States. Pursuant to the above, the District Engineer of the St. Louis District, Corps of Engineers, directed that a safety inspection of the Harrisonville City Lake Dam be made.

b. Purpose of Inspection. The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and visual inspection, in order to determine if the dam poses hazards to human life or property.

c. Evaluation Criteria. Criteria used to evaluate the dam were furnished by the Department of the Army, Office of the Chief of Engineers, in "Recommended Guidelines for Safety Inspection of Dams." These guidelines were developed with the help of several Federal agencies and many state agencies, professional engineering organizations, and private engineers.

### 1.2 DESCRIPTION OF PROJECT

#### a. Description of Dam and Appurtenances.

(1) The dam is an earth structure located in the valley of a tributary to Big Creek in northcentral Cass County, Missouri (Plate 1). The dam is approximately 50 feet high from the natural stream channel at the outlet of the principal spillway to the crest, and is approximately 1,900 feet long. The axis of the dam runs from south-southwest to north-northeast. The upstream embankment of the dam is protected from erosion by riprap which is poorly graded in some areas, and the downstream slope is grass covered. The embankment from toe to crest is highest approximately 300 feet from the right abutment. The watershed is primarily comprised of farmland and grassland. Topography in the vicinity of the dam is shown on Plate 2.

(2) The principal spillway consists of a reinforced concrete morning glory shaft inlet near the right abutment of the dam. It discharges through a 96-inch diameter corrugated metal pipe passing through the dam embankment to a special concrete discharge headwall downstream of the embankment. The channel downstream of the spillway outlet is a natural stream channel with a bed of shale.

(3) An emergency broad-crested weir overflow spillway was constructed at the left abutment. The spillway consists of a rock and

earth trapezoidal overflow weir approximately 3 feet high, 170 feet long, and 19 feet wide at the top. It discharges to an excavated earthen channel which is well-covered with grass.

(4) Pertinent physical data are given in paragraph 1.3.

b. Location. The dam is located in northcentral Cass County, Missouri, as indicated on Plate 1. The lake formed by the dam is shown on the United States Geological Survey 7.5 minute series quadrangle map for Pleasant Hill, Missouri in Section 26 of T46N, R31W.

c. Size Classification. Criteria for determining the size classification of dams and impoundments are presented in the guidelines referenced in paragraph 1.1c above. Based on these criteria, the dam and impoundment are in the intermediate size category.

d. Hazard Classification. The hazard classification assigned by the Corps of Engineers for this dam is as follows: The Harrisonville City Lake Dam has a high hazard potential, meaning that the dam is located where failure may cause loss of life, and serious damage to homes, agricultural, industrial and commercial facilities, and to important public utilities, main highways, or railroads. For the Harrisonville City Lake Dam the estimated flood damage zone extends downstream for approximately five miles. Within the damage zone are eleven homes, six farm buildings, State Highway 7, and one improved road crossing.

e. Ownership. The dam is owned by the City of Harrisonville, P.O. Box 367, Harrisonville, Missouri 64701.

f. Purpose of Dam. The dam forms a 410-acre lake for water supply and recreation.

g. Design and Construction History. The dam was designed in 1970 and built in 1971. Designers were Lankford & Collins, Consulting Engineers, Kansas City, Missouri. A set of plans and some of the design calculations were available for review during the Phase I inspection of the dam.

h. Normal Operating Procedure. Normal rainfall, runoff, transpiration, evaporation, withdrawals for water supply, and flow through the principal spillway all combine to maintain a relatively stable water surface elevation. Withdrawals for water supply are made from a pump station located approximately 3,500 feet upstream from the centerline of the dam on the middle arm of the lake.

### 1.3 PERTINENT DATA

a. Drainage Area - 9,470 acres

b. Discharge at Damsite.

(1) Normal discharge at the damsite is through an uncontrolled shaft spillway.

(2) Flood discharge at the damsite is through the shaft spillway and over an uncontrolled trapezoidal shaped weir emergency spillway.

(3) Estimated experienced maximum flood at damsite - Unknown.

(4) Estimated ungated spillway capacity at maximum pool elevation 38,740 cfs (top of Dam El.909.4).

c. Elevation (Feet above m.s.l.).

(1) Top of dam - 909.4  $\pm$  (see Plate 3)

(2) Principal spillway crest - 895.0

(3) Emergency spillway crest - 896.7  $\pm$

(4) Streambed at toe of dam - 860.0  $\pm$

(5) Maximum tailwater - Unknown.

d. Reservoir.

(1) Length of maximum pool - 12,600 feet  $\pm$

(2) Length of normal pool - 10,300 feet  $\pm$

e. Storage (Acre-feet).

(1) Top of dam - 13,520

(2) Principal spillway crest - 6,900

(3) Emergency spillway crest - 7,650

(4) Design surcharge - Not available.

f. Reservoir Surface (Acres).

- (1) Top of dam - 660
- (2) Principal spillway crest - 410
- (3) Emergency spillway crest - 450

g. Dam.

- (1) Type - Earth embankment
- (2) Length - 1,900 feet
- (3) Height - 50 feet  $\pm$
- (4) Top width - 20 feet
- (5) Side slopes - varies (see Plate 5)
- (6) Zoning - Dam plans indicate an embankment Zone 1 beginning at Elevation 875 at the central embankment Zone 2 which slopes downward at 20.0 H to 1.0 V in the upstream direction. Downstream embankment Zone 3, beginning at Elevation 875 at the central embankment zone, slopes downward at 20.0 H to 1.0 V in the downstream direction (see Plate 4). Upstream and downstream embankment zones were installed to improve dam stability.
- (7) Impervious core - Plans do not indicate construction of separate impervious core within central embankment.
- (8) Cutoff - Plans do not indicate construction of a cutoff beneath dam embankment.
- (9) Grout curtain - Plans do not indicate use of a grout curtain.
- (10) Interior drainage system - Plans indicate a 24-inch thick drainage blanket extending from 55 feet upstream of the dam centerline to 97 feet downstream and from Station 1+00 to Station 9+00, and a 20-foot wide blanket centered on the dam centerline extends from Station 9+00 to Station 11+00. Blanket is drained by a 12-inch diameter perforated corrugated metal pipe (CMP) extending for a length of 480 feet along the downstream edge of the blanket and connected to a 12-inch diameter CMP which extends 430 feet downstream of the blanket to provide gravity discharge.

h. Diversion and Regulating Tunnel - None.

i. Principal spillway.

(1) Type - Shaft with morning glory inlet.

(2) Diameter - Inlet - 12 feet; shaft - 8 feet.

(3) Crest elevation - 895.0 feet m.s.l.

(4) Gates - None.

(5) Upstream channel - Not applicable.

(6) Downstream channel - Open channel comprised of broken shale located near the toe of the downstream embankment slope at the right abutment.

j. Emergency spillway.

(1) Type - Earth and rock overflow weir.

(2) Width of channel - 170 feet.

(3) Crest elevation - 896.7  $\pm$  feet m.s.l.

(4) Gates - None.

(5) Upstream channel - Not applicable.

(6) Downstream channel - Open grassed waterway. This channel was excavated at the time the dam was built. The channel lies parallel with the axis of the dam downstream of the dam embankment and joins the natural stream channel downstream of the principal spillway outlet (see Plate 3).

## SECTION 2 - ENGINEERING DATA

### 2.1 DESIGN

The following items of design data were available to members of the inspection team:

- a. A copy of the report entitled "Soils Engineering Report; Final Investigation; Harrisonville Dam; Harrisonville, Missouri" by A.C. Kirkwood & Associates and Layne - Western Company, Inc. (no date given).
- b. A set of plans for the water impoundment by Lankford & Collins, Consulting Engineers (dated 1970). The 25 sheets of drawings included plans of the dam, emergency spillway, pump station, and water transmission main. The pump station is located approximately 3,500 feet upstream from the centerline of the dam on the middle arm of the lake.
- c. A copy of the plans for the morning glory inlet on the principal spillway and the 96-inch spillway conduit through the dam. These plans by Armco Metal Products Division were a single sheet of drawings and dated March 4, 1971.
- d. Miscellaneous calculations, notes, and memorandums pertaining to the project from the files of Lankford & Collins.

### 2.2 CONSTRUCTION

Detailed construction records were available in the form of daily construction logs. The dam was finished in 1971.

### 2.3 OPERATION

The maximum recorded loading on the dam is not known. Available records indicate that the 96-inch corrugated metal pipe serving as the principal spillway conduit ruptured during a period of high inflow in early 1973. This caused some scouring of the dam embankment around the spillway conduit. Repairs were effected and no further problems are known to have occurred.

### 2.4 EVALUATION

- a. Availability. The items mentioned in paragraph 2.1 above were available through the firm responsible for the design of the dam. This firm is Lankford & Collins, Consulting Engineers, Kansas City, Missouri.
- b. Adequacy. The engineering drawings, calculations, and reports available aided in the assessment of the design, construction, and operation of the dam. However, seepage and stability calculations were

not readily available for review. Detailed seepage and stability analyses should be performed as required by the guidelines.

c. Validity. The engineering data available indicates that the dam as designed by Lankford & Collins, Consulting Engineers, and actually constructed was located downstream of the damsite investigated by Layne-Western Company, Inc. for A.C. Kirkwood & Associates. The description of subsurface conditions for the dam and foundation strength parameters provided in the Layne-Western report may not represent the foundation conditions beneath the actual constructed dam. It is anticipated that the embankment strength parameters provided in the Layne-Western report are representative of borrow materials for embankment construction available in the area.

## 2.5 GEOLOGY.

The Harrisonville City Lake Dam is located across a valley formed in residual soils and bedrock. The soil of the area consists of the Summit Silt Loam soil series consisting of clayey silts and silty clays derived from weathering of the underlying shale bedrock. For engineering purposes the soils are classified as ML or CL. Alluvial silty clay with pockets of sand and gravel is present along the stream channels. The bedrock consists of shales and sandstones of the Pleasanton Group and limestones and shales of the Kansas City Group of the Pennsylvanian System. The left abutment is anticipated to consist of residual soil overlying shale and sandstone bedrock. The right abutment is in shale and sandstone of the Pleasanton Group and limestone and shale of the Kansas City Group. The foundation of the dam is residual soil overlying shale of the Pleasanton Group. The natural discharge channel downstream of the principal spillway consists of shale overlain by residual shale.

## SECTION 3 - VISUAL INSPECTION

### 3.1 FINDINGS

a. General. A visual inspection of Harrisonville City Lake Dam was made on 26 April 1979. The inspection team included professional engineers with experience in dam design and construction, hydrology - hydraulic engineering, and geotechnical engineering. Specific observations are discussed below. No observations were made of the condition of the upstream face of the dam below the pool elevation at the time of the inspection.

b. Dam. The inspection team observed the following items at the dam. The riprap on the upstream face of the embankment, especially near the right abutment, is poorly graded and erosion has occurred around some of this riprap. Erosion has also occurred in the berm downstream of the dam embankment, probably as the result of local runoff following vehicle tracks. This erosion is located approximately between Stations 10+00 and 13+00 and varies in width from 4 to 6 feet and in depth from 3 to 4 feet. The upstream face above the riprap, the crest, and the downstream face are all generally well covered with grass. A few small trees (2 to 4 inches in diameter) are growing on the upstream face of the embankment. Minor seepage was observed coming from the natural shale in the right abutment near the principal spillway discharge structure. The seepage was clear and only a trickle which would be less than a gallon per minute. No sloughing, cracking, or seepage was observed on the downstream embankment. A few small animal burrows were noticed in the embankment. Seepage is collected by a blanket drain under the embankment with a 12-inch perforated collector pipe near the downstream toe of the embankment. This perforated pipe leads to a 12-inch corrugated metal pipe which discharges to the natural stream channel 400 feet downstream from the dam. When the flap gate over the outlet of this pipe was lifted, a small amount of flow came out for a period of less than a minute and then stopped. Material observed in the pipe was suspected to be from reverse flow into the pipe.

The dam does not exhibit signs of detrimental settlement, sloughing, cracking, or overstress.

c. Appurtenant Structures. The inspection team observed the following items pertaining to appurtenant structures. The morning glory inlet to the shaft spillway near the right dam abutment appears to be in good condition, but the inspection team could only view it from a distance of about 80 feet, which was the distance from the inlet to the upstream embankment at the water surface. The 96-inch corrugated metal discharge conduit passes through the embankment and terminates at a special discharge headwall 300 feet downstream of the inlet and 180 feet

downstream of the axis of the dam. The condition of this discharge conduit is unknown, only the outlet end was accessible to inspection. The special concrete discharge headwall is generally in good condition, but there is an area of 3 feet by 4 feet on the right wall of the headwall in which the concrete has spalled to depths less than 1 inch. The channel immediately downstream of the discharge structure has eroded to a depth of 3 feet lower than the apron. Erosion probably due to surface runoff from the dam slope and downstream right abutment was also observed along the left wingwall. The earth and rock emergency overflow spillway near the left abutment of the dam is in good condition, with no significant erosion or obstructions to flow evident. The grass-lined channel downstream of the spillway also appears to be in good condition. A minor amount of rivulet erosion has occurred in the discharge channel, but it has no effect on the safety of the dam.

d. Reservoir Area. No slides or excessive erosion due to wave action were observed along the shore of the reservoir.

e. Downstream Channel. The natural stream channel downstream of the principal spillway discharge headwall is comprised primarily of the broken shale, with a moderate amount of vegetation in the form of medium to large trees along the channel. The channel downstream of the emergency spillway is 200 feet wide and is generally well covered by grass. The emergency spillway discharge channel leads to the natural stream channel 600 feet downstream of the principal spillway discharge headwall.

f. Geology. A visual inspection of the dam and abutment areas confirmed the presence of silty clay residual soil overlying shale bedrock in the area of the dam. An outcrop of the upper unnamed formation of the Pleasanton Group and the Hertha, Ladore, and Swope Formations of the Kansas City Group was observed in the right abutment. The base of the Kansas City Group was at the approximate elevation of the top of the dam. Shale of the unnamed upper formation of the Pleasanton Group was present in the right side of the downstream discharge channel just below the headwall of the outlet of the principal spillway. A minor amount of seepage (less than 1 gpm) was observed in the shale near the headwall. The material in the surface of the embankment and emergency spillway was silty clay (CL).

### 3.2 EVALUATION

On the basis of the visual inspection, the dam and appurtenant structures appear to be in good condition and generally operating as planned. No evidence of abnormal sloughing or settlement of the embankment is apparent. Seepage through the embankment appears to be minimal. Both the dam embankment and the emergency spillway channel appear to be sufficiently protected by grass cover to protect them from severe erosion during a period of dam overtopping and high spillway flow. Items requiring remedial action or continuing observation are:

(1) Erosion around the riprap on the upstream face of the embankment, particularly near the right abutment of the embankment.

(2) Erosion in the berm downstream of the embankment as a result of local runoff.

(3) The growth of a few small trees on the upstream face of the dam embankment. Although not presently a problem, the trees should be removed before they become one.

(4) Erosion in the stream channel immediately downstream of the discharge apron for the principal spillway.

(5) Erosion next to the left wingwall of the principal spillway discharge structure.

(6) Spalling of concrete on the right wingwall of the principal spillway discharge structure.

## SECTION 4 - OPERATIONAL PROCEDURES

### 4.1 PROCEDURES

The pool is primarily controlled by rainfall, runoff, evaporation, withdrawals for water supply, and flow-through of the uncontrolled principal spillway.

### 4.2 MAINTENANCE OF DAM

Maintenance performed was unknown.

### 4.3 MAINTENANCE OF OPERATING FACILITIES

No operating facilities are known to exist.

### 4.4 DESCRIPTION OF ANY WARNING SYSTEM IN EFFECT

The inspection team is not aware of any existing warning system for this dam.

### 4.5 EVALUATION

Erosion around the riprap on the upstream face of the embankment, particularly near the right abutment, gully erosion in the berm downstream of the dam embankment adjacent to the center of the dam, and erosion of the stream channel immediately downstream of the principal spillway discharge apron increase the potential for failure and warrant repair and regular monitoring.

## SECTION 5 - HYDRAULIC/HYDROLOGIC

### 5.1 EVALUATION OF FEATURES

a. Design Data. Most of the hydraulic and hydrologic calculations and design data used by the firm that designed Harrisonville City Lake Dam were available for review by members of the inspection team. Included in this data were calculations on design flood inflows, spillway sizes and configurations, spillway discharges, and water surface elevations resulting from various design storms. The dam was designed to pass the probable maximum flood with freeboard for wind and wave action. The probable maximum flood inflow hydrograph was calculated by the method in Section 58 of the Design of Small Dams (2).

b. Experience Data. The drainage area and lake surface area are developed from USGS Pleasant Hill, Harrisonville, Raymore, and Peculiar Quadrangle Maps. The spillway and dam layouts are from surveys made during the inspection and construction plans.

c. Visual Observations.

(1) Both the principal spillway and the emergency spillway appear to be in good condition, but the condition of the discharge conduit for the principal spillway could not be determined by visual inspection. Some erosion has occurred in the stream channel immediately below the discharge headwall apron for the principal spillway.

(2) No facilities are available which could serve to draw down the pool.

(3) The principal spillway is a shaft spillway with morning glory inlet located near the right abutment of the dam embankment. The emergency spillway is an earth and rock overflow section near the left dam abutment. It does not appear that large spillway discharges will endanger the integrity of the dam, unless the principal spillway discharge conduit would rupture, as it has done previously.

d. Overtopping Potential. The spillways will not pass the probable maximum flood, which is the spillway design flood recommended by the guidelines, without overtopping the dam. The probable maximum flood is defined as the flood discharge that may be expected from the most severe combination of critical meteorologic and hydrologic conditions that are reasonably possible in the region. The spillways will pass 85 percent of the probable maximum flood without overtopping the dam. This flood is greater than the 100-year flood. According to the recommended guidelines from the Department of the Army, Office of the Chief of Engineers, a high hazard dam of intermediate size should pass 100 percent of the probable maximum flood. The portion of the estimated peak discharge of

the probable maximum flood overtopping the dam would be 12,400 cfs of the total discharge from the reservoir of 48,900 cfs. The estimated duration of overtopping is 2.0 hours with a maximum height of 1.1 feet. The grass cover on the embankment crest and back slope will provide protection from severe erosion during short periods of overtopping. Failure of upstream water impoundments shown on the 1975 revised USGS map would not have a significant impact on the hydrologic or hydraulic analysis.

The hydraulic and hydrologic calculations supplied by the firm that designed the dam indicate that the spillways would pass the probable maximum flood without overtopping the dam. Calculations performed during the Phase I report indicate that the spillways would pass 85 percent of the probable maximum flood without overtopping the dam. The difference can be attributed primarily to the rainfall distributions and the rainfall reduction factor. The design firm used the SCS rainfall distribution and an areal rainfall reduction factor. In the Phase I calculations no reduction factor was used and the Corps of Engineers rainfall distribution (as specified in the guidelines) was used, with both of these factors increasing the peak and volume of the inflow hydrograph. Minor settlement of the dam and differences in drainage area and the emergency spillway rating curve account for a minor portion of the difference in the two analyses.

According to the St. Louis District, Corps of Engineers, the estimated effect from rupture of the dam could extend approximately five miles downstream of the dam. There are eleven homes, six farm buildings, State Highway 7, the Missouri-Pacific Railroad, the Chicago and Rock Island Railroad, and one improved road crossing downstream of the dam which could be severely damaged and lives could be lost should failure of the dam occur.

## SECTION 6 - STRUCTURAL STABILITY

### 6.1 EVALUATION OF STRUCTURAL STABILITY

a. Visual Observations. Visual observations of conditions which affect the structural stability of this dam are discussed in Section 3, paragraph 3.1b.

b. Design and Construction Data. Design data relating to the structural stability of the dam were incomplete. Data describing the subsurface conditions and appropriate foundation strength parameters at the constructed location of the dam are apparently not available. Sufficient records are not available to substantiate that the data provided in the soils engineering report (Layne-Western Company, Inc. report) is appropriate for the design of the dam along the alignment where the dam was constructed.

The slopes of the dam as constructed are consistent with the design slope recommendations provided by soils engineering report Layne-Western Company, Inc. The Layne-Western Company, Inc. report selected a cohesion value of 1,500 psf and an internal friction value of zero degrees to represent the engineering properties of the embankment materials obtained from the borrow area. A value of 1,500 psf for cohesion and an internal friction value of zero degrees appears to be an appropriate design value for silty clay (CL) materials generally originating from shale (residual soil) in the site area.

Strength parameters of the foundation soils for the site investigated by Layne-Western Company, Inc. were missing from the available report.

The available soils engineering report contained design factors of safety for end-of-construction conditions only as determined by the circular arc and sliding wedge modes of failure.

Field testing data were not available to evaluate the degree and uniformity of compaction obtained during construction of the dam.

c. Operating Records. No operational records exist.

d. Post Construction Changes. In the summer of 1973, the discharge conduit of the principal spillway failed during a period of high flow. This rupture in the conduit caused some erosion of the dam embankment around the broken portion of the conduit. Shortly thereafter, the conduit and embankment were repaired and normal operation was resumed. No other post construction changes are known.

e. Seismic Stability. The dam is located in Seismic Zone 1 which is a zone of minor seismic risk. A properly designed and constructed earth dam using sound engineering principles and conservatism should pose no serious stability problems during earthquakes in this zone.

The seismic stability of an earth dam is dependent upon a number of factors: The important factors being embankment and foundation material classification and shear strengths; abutment materials, conditions, and strength; embankment zoning; and embankment geometry. Adequate descriptions of foundation and abutment conditions or static stability analyses to assess the seismic stability of this embankment were not available.

## SECTION 7 - ASSESSMENT/REMEDIAL MEASURES

### 7.1 DAM ASSESSMENT

a. Safety. Items noted during the visual inspection by the inspection team which should be monitored or controlled are erosion around the riprap on the upstream face of the embankment, particularly near the right abutment, gully erosion in the berm downstream of the dam embankment, erosion near the left wingwall of the principal spillway discharge structure, and erosion in the channel downstream of the principal spillway discharge apron. Based upon visual observations, the dam does not exhibit signs of detrimental settlement, sloughing, cracking, or overstress. The dam was constructed with an internal drainage blanket to control seepage through the embankment and relieve hydrostatic pressures in the foundation for the portion of dam where the height exceeds about 25 feet. Stabilizing berms with a slope of about 20.0 H to 1.0 V were constructed both upstream and downstream of the central embankment where the height exceeds 35 feet to provide additional foundation stability and resistance against sliding.

b. Adequacy of Information. The conclusions in this report were based only on performance history, visual conditions, and the limited engineering design data readily available. The inspection team considers that these data are sufficient to support the conclusions herein. The engineering data readily available was not sufficiently detailed to allow verification of the seepage and structural stability of the dam. Seepage and stability analyses comparable to the requirements of the "Recommended Guidelines for Safety Inspection of Dams" were not available, which is considered a deficiency.

c. Urgency. It is the opinion of the inspection team that a program should be developed as soon as possible to implement remedial measures recommended in paragraph 7.2b. If the safety deficiencies listed in paragraph 7.1a are not corrected, they will continue to deteriorate and lead to a serious potential of failure.

d. Necessity for Phase II. The Phase I investigation does not raise any serious questions relating to the safety of the dam or identify any serious dangers that would require a Phase II investigation.

e. Seismic Stability. This dam is located in Seismic Zone I. Adequate description of foundation design parameters, foundation and abutment conditions, or static stability analyses to assess the seismic stability of this embankment was not available and therefore no inferences will be made regarding the seismic stability. An assessment of the seismic stability should be included as part of the recommended stability analysis.

## 7.2 REMEDIAL MEASURES

a. Alternatives. The present spillways have the capacity to pass 85 percent of the probable maximum flood without overtopping the dam. In order to pass 100 percent of the probable maximum flood as required by the Recommended Guidelines, the spillway size and/or height of dam would need to be increased.

Stability analyses should be performed by a professional engineer experienced in the design and construction of dams.

b. Operation and Maintenance Procedures. The following operation and maintenance procedures are recommended:

(1) Check the upstream face of the dam periodically to assess the severity of erosion around the riprap. If this erosion becomes excessive, additional riprap will have to be placed or the existing riprap will have to be removed and replaced with properly graded riprap.



(2) The localized erosion in the berm downstream of the dam embankment should be filled and protected from further erosion by a suitable vegetative ground cover.


(3) The small trees on the upstream face of the dam embankment should be removed under the guidance of an engineer experienced in the design and construction of earthen dams, and a program should be implemented for regular removal of any new trees on the embankment.


(4) Check the stream channel immediately downstream of the principal spillway discharge apron after periods of significant discharge to determine whether erosion is undercutting the floor of the headwall. If such a situation is noted, erosion protection should be provided.

(5) A detailed inspection of the dam should be made periodically by an engineer experienced in design and construction of dams. More frequent inspections may be required if additional deficiencies are observed or the severity of the reported deficiencies increases.

(6) Check the outlet of the drainage blanket discharge line after periods of significant discharge through the primary spillway and maintain the headwall structure and flap gate free of silt and debris.

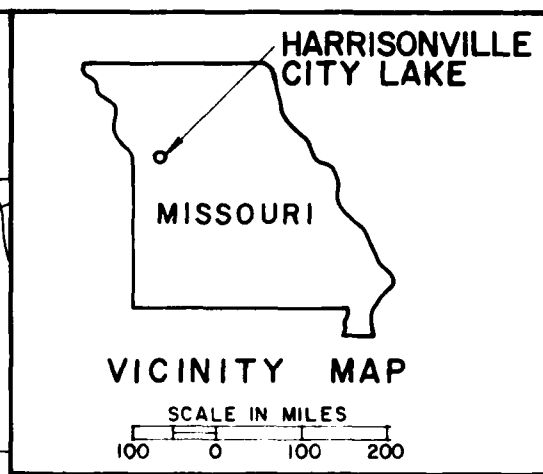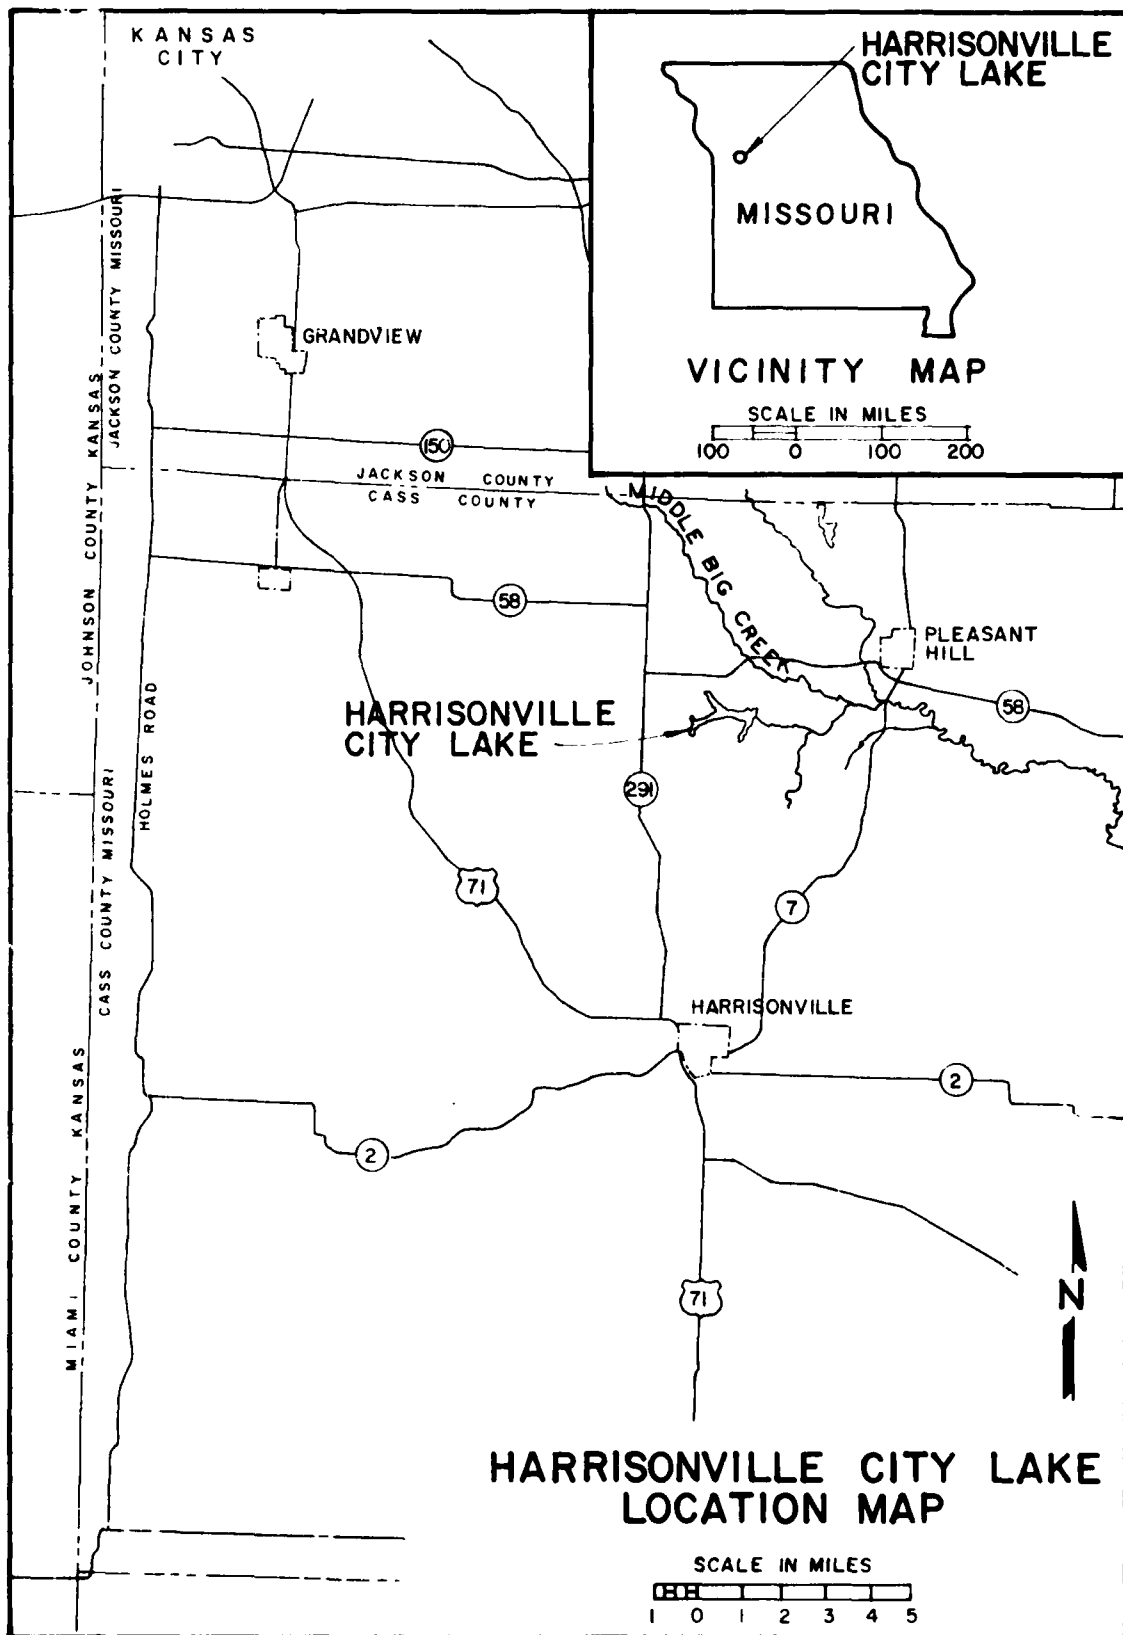

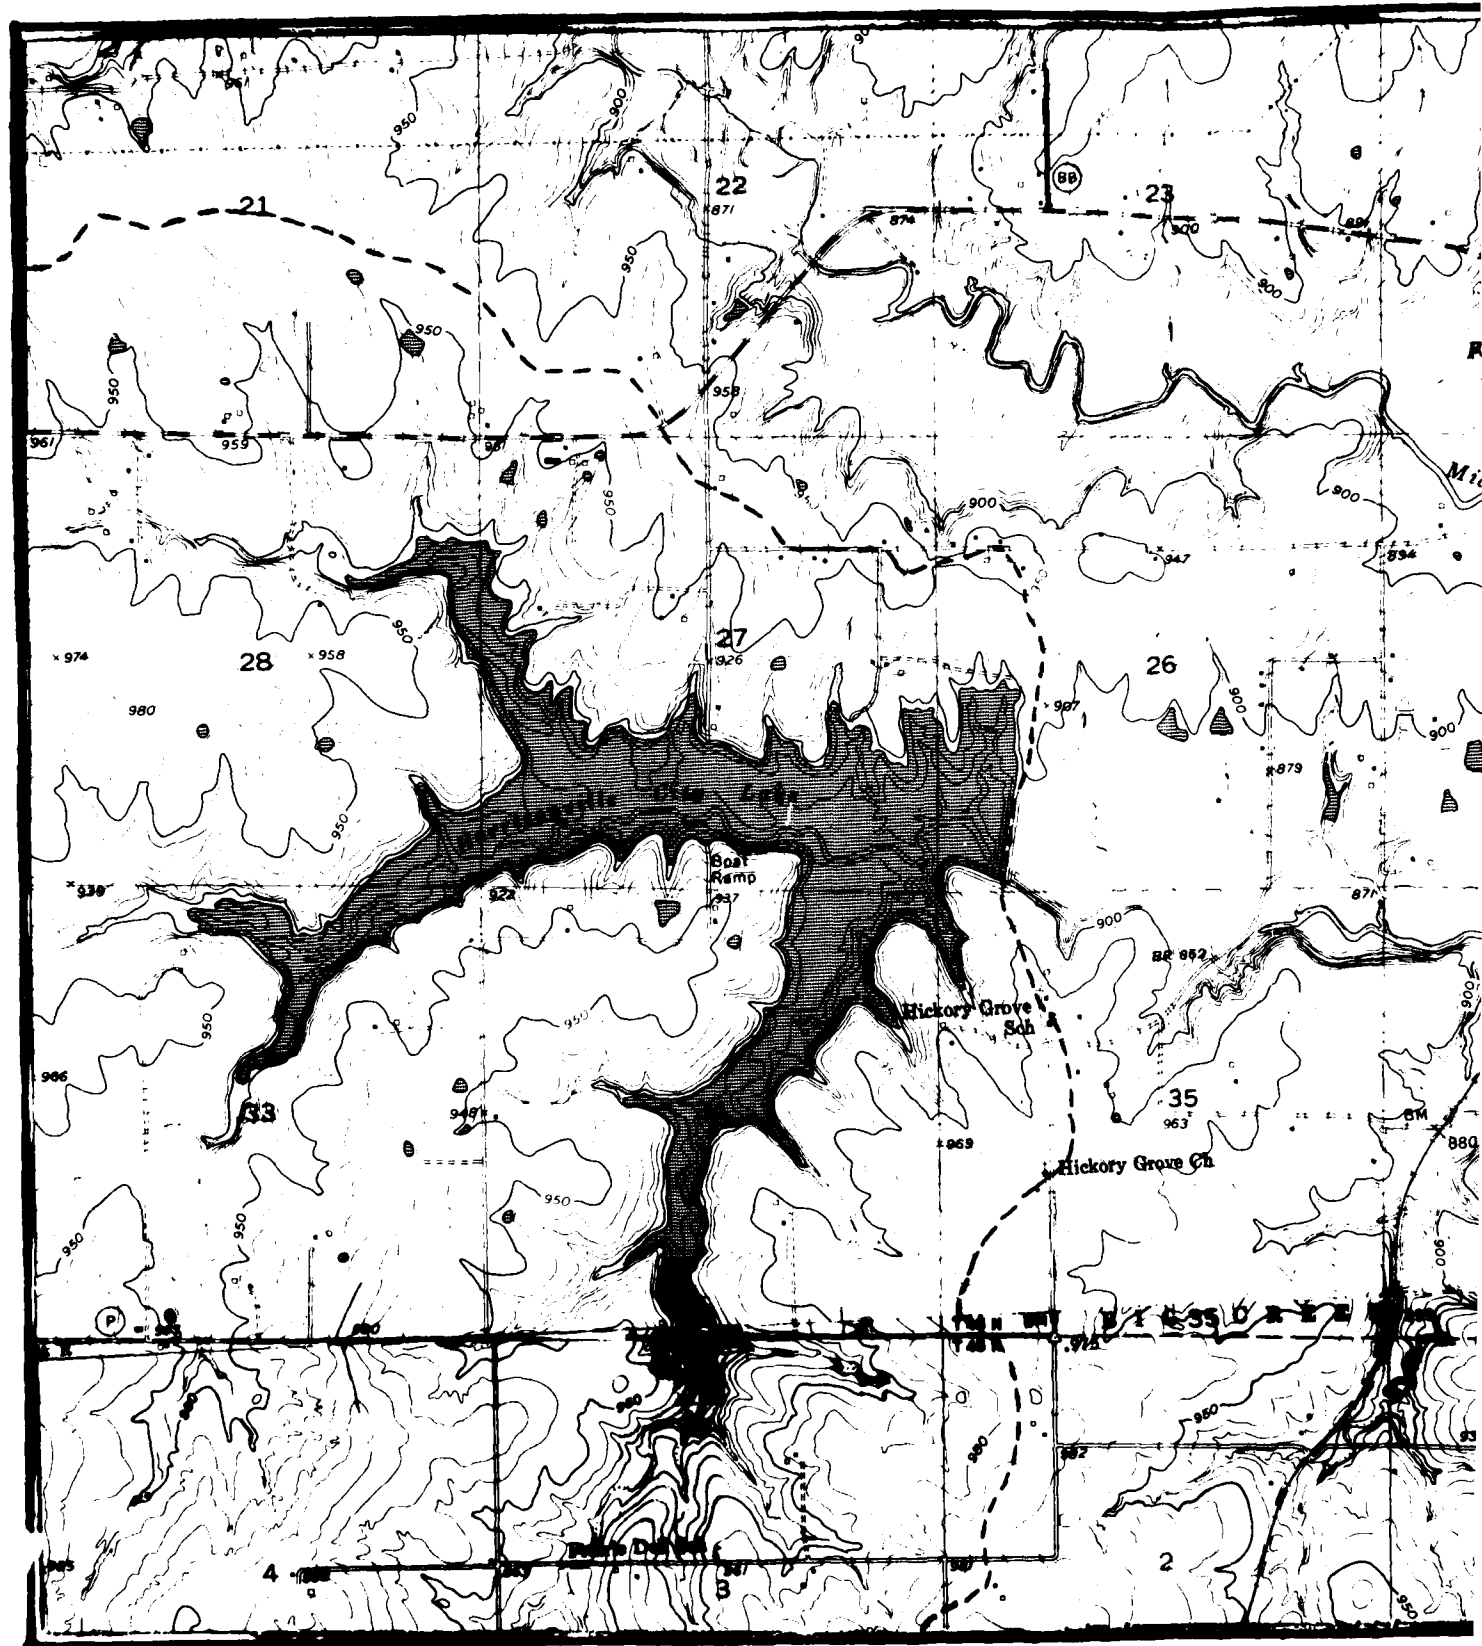


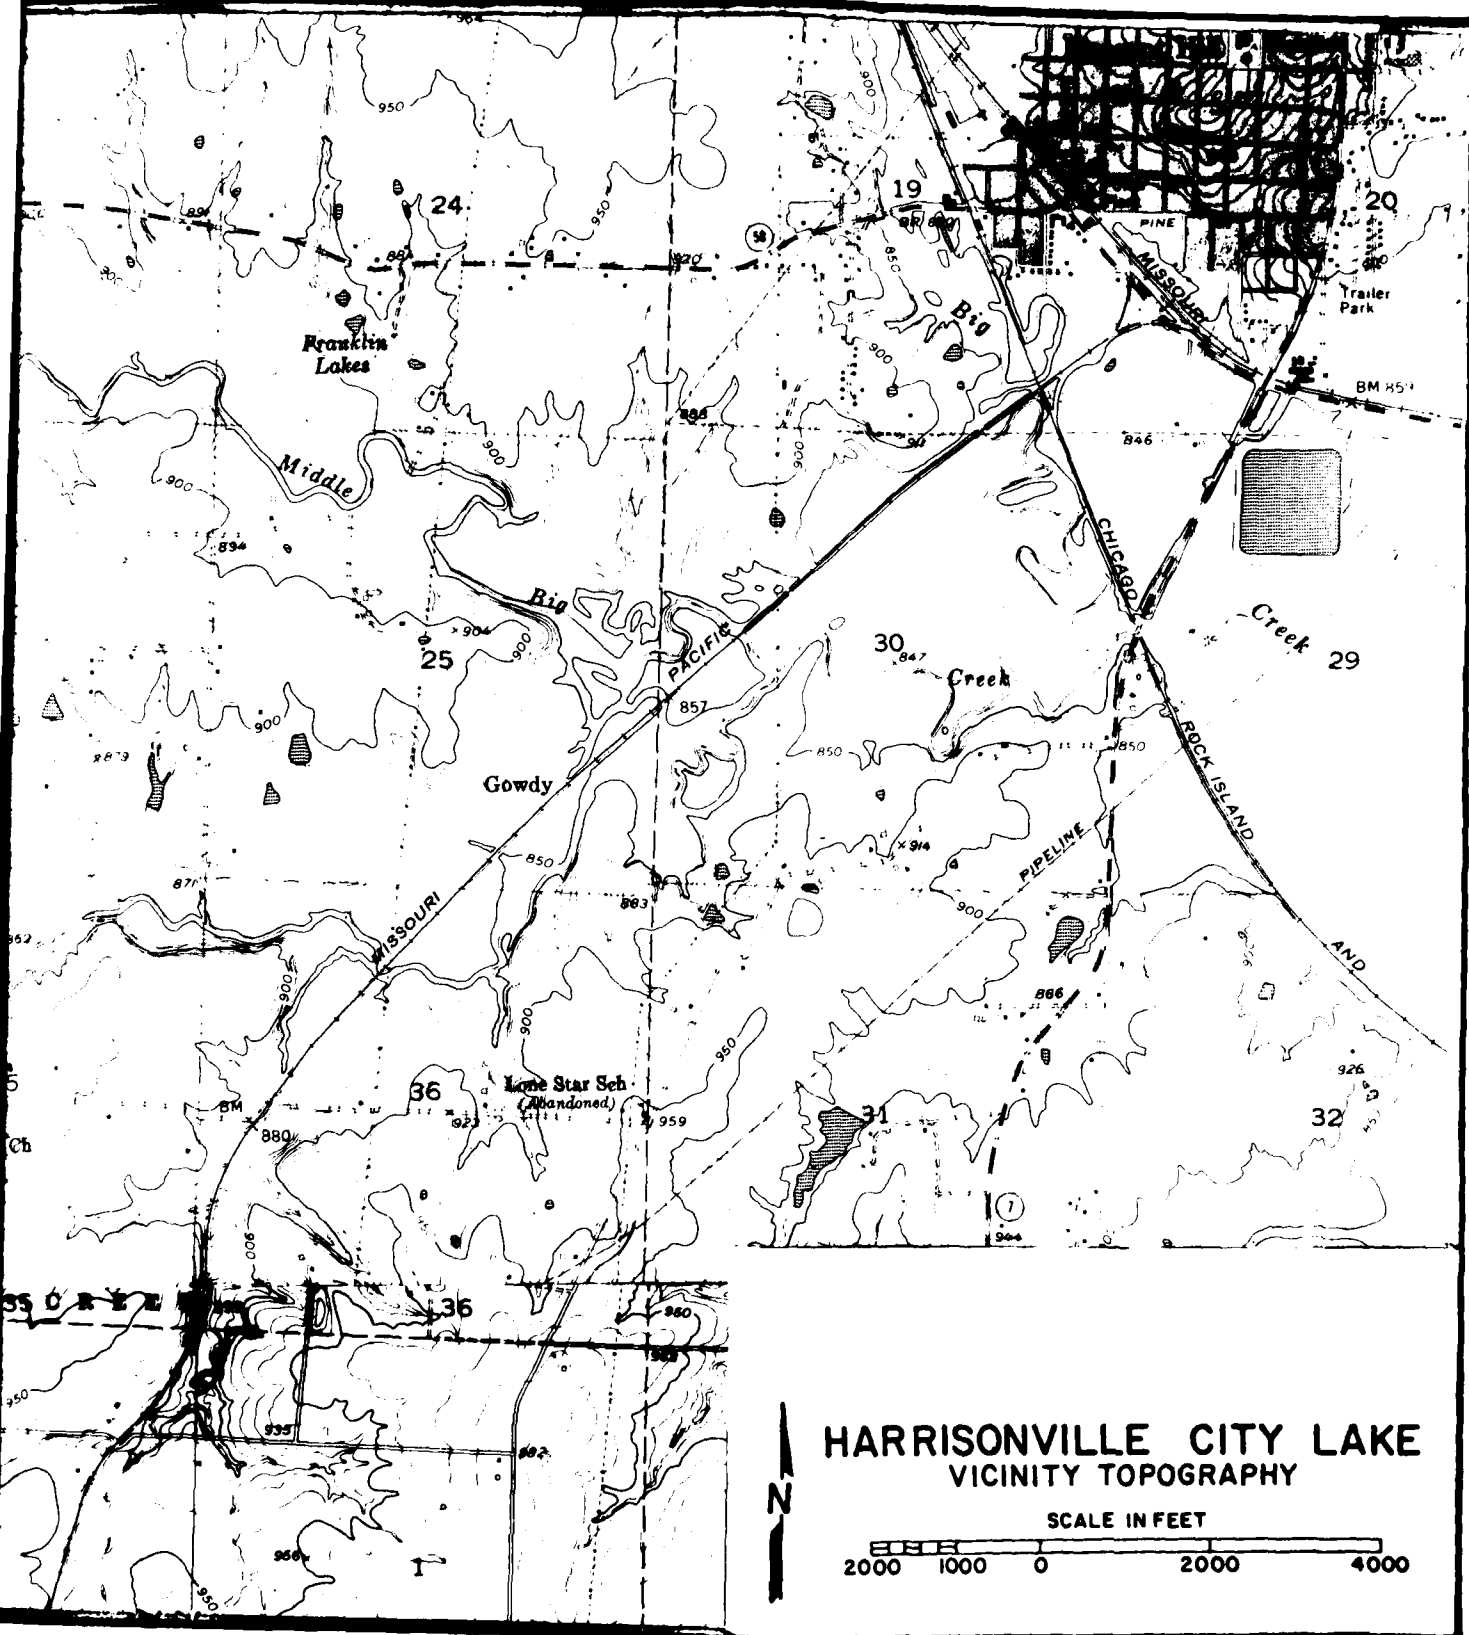


HARRISONVILLE CITY LAKE  
VICINITY TOPOGRAPHY


SCALE IN FEET

2000 1000 0 2000 4000

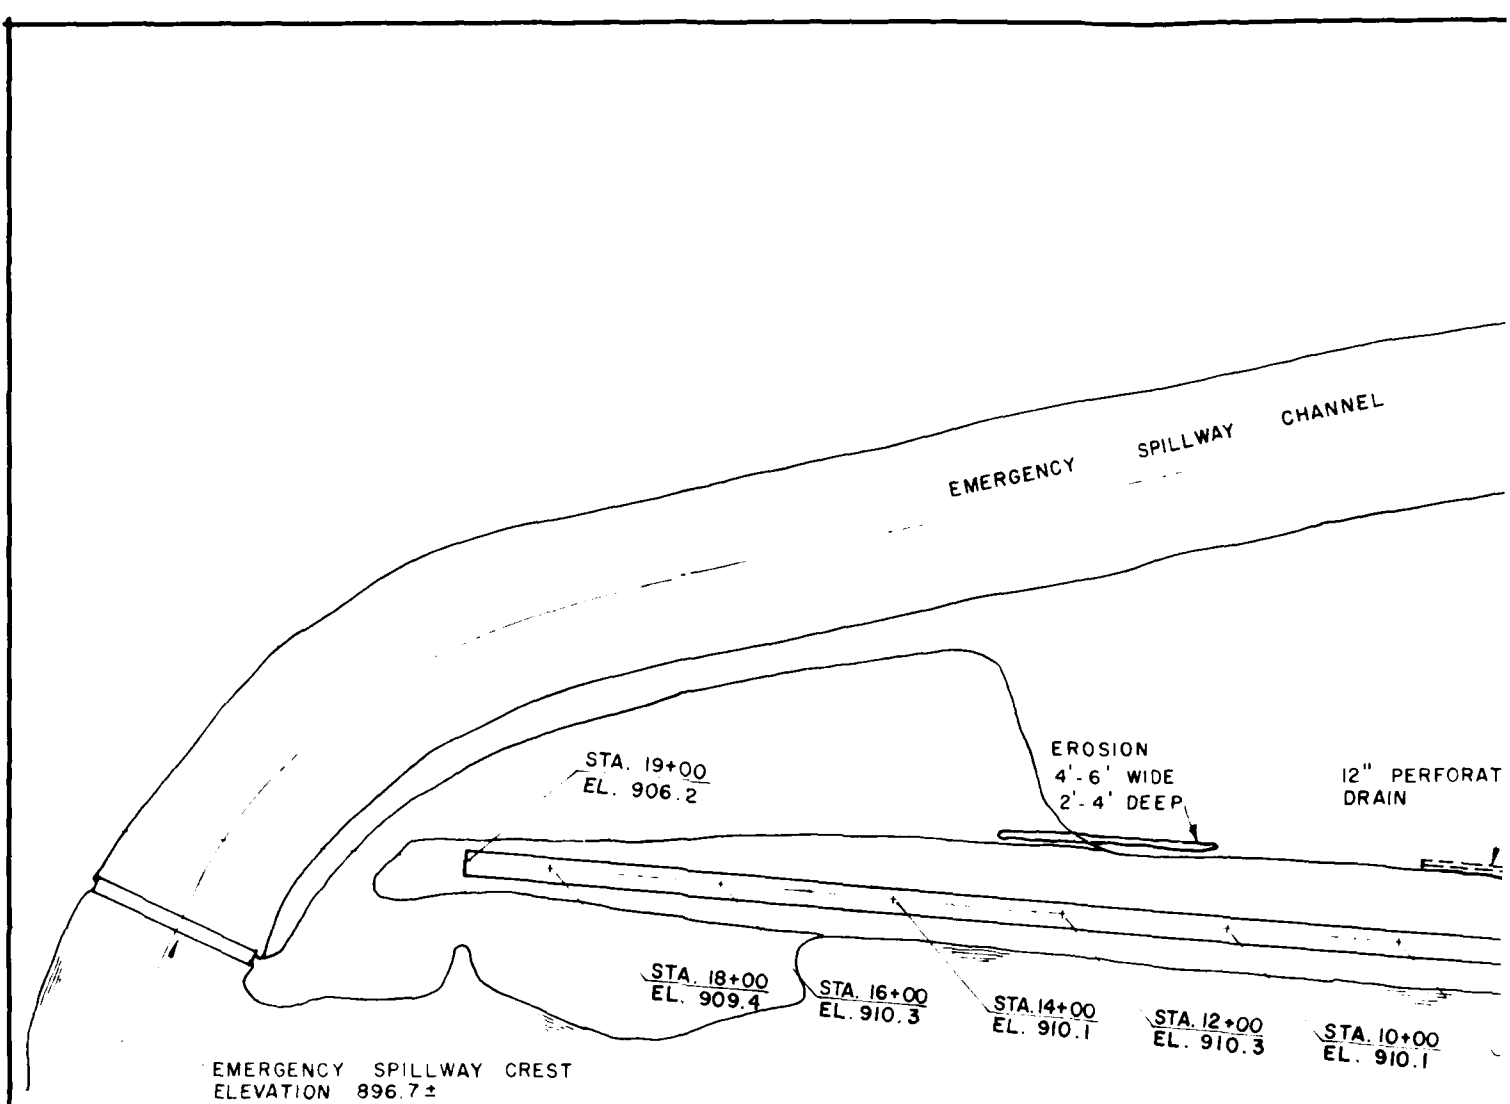


# HARRISONVILLE CITY LAKE

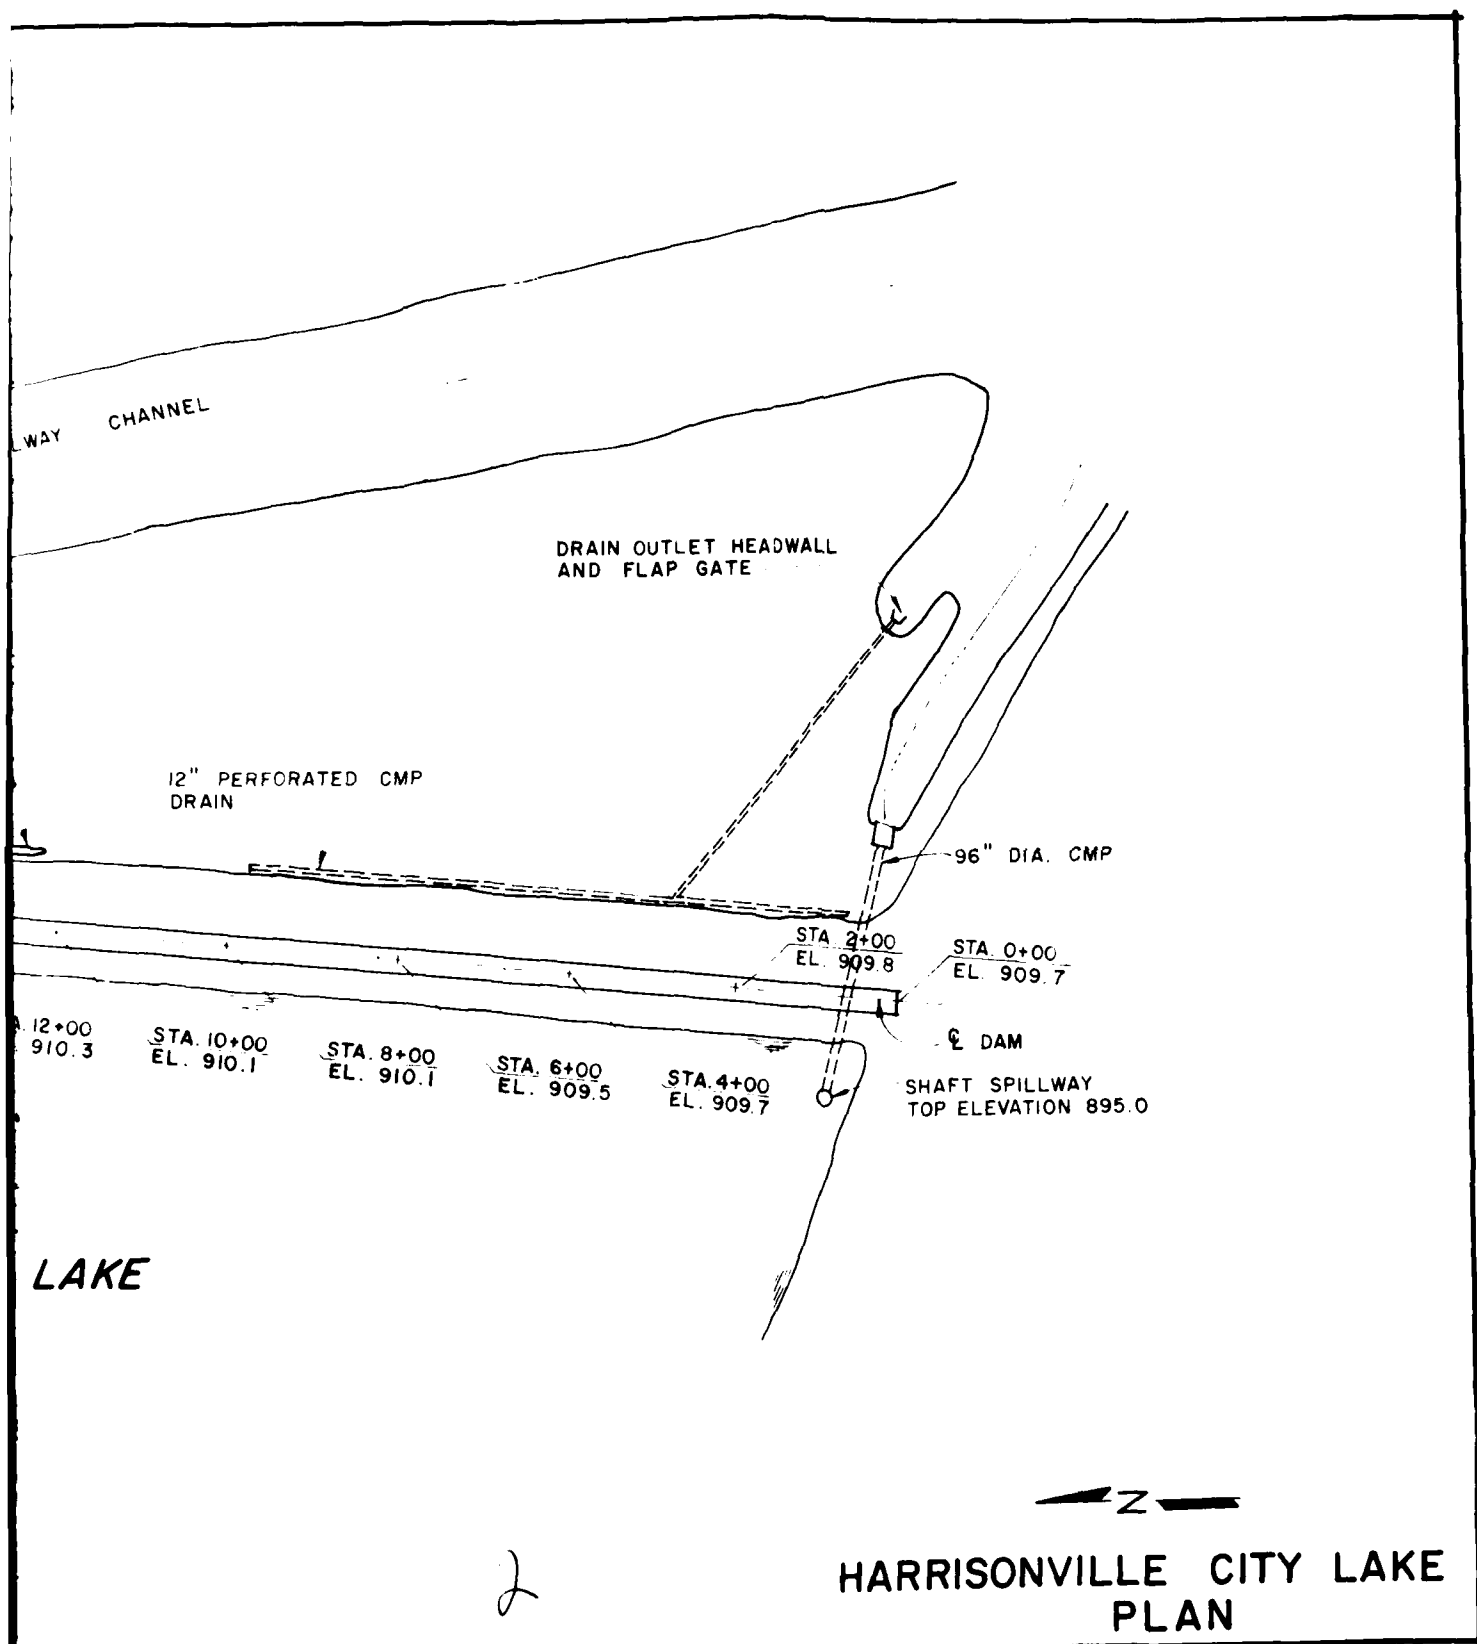

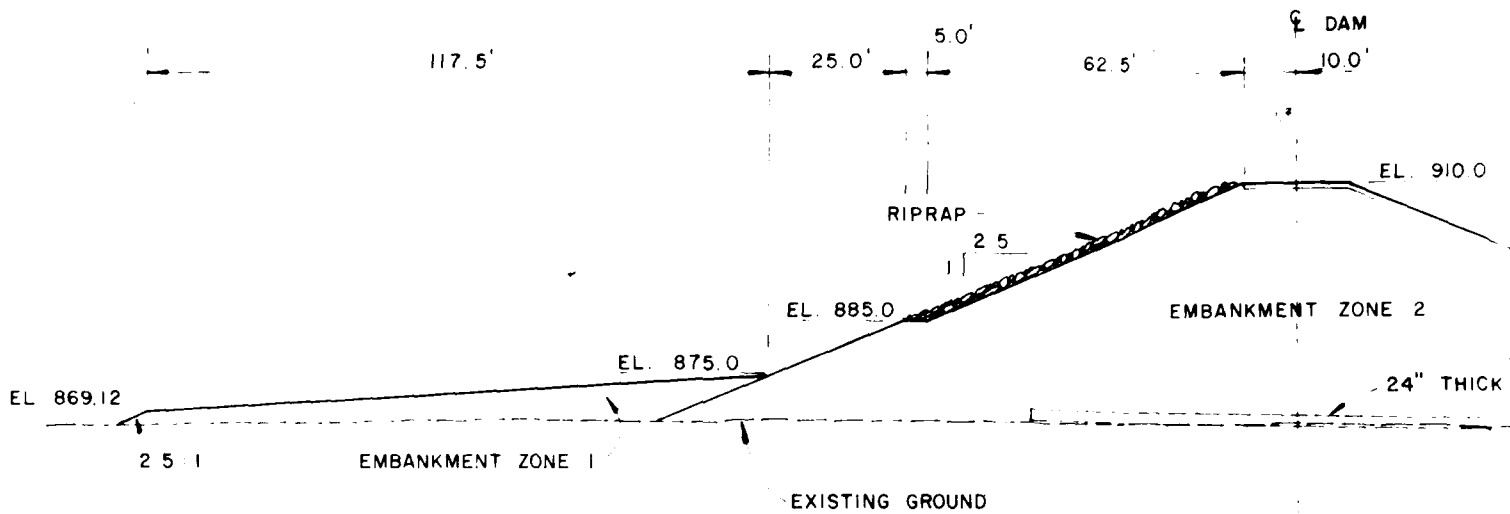

**TYPICAL CROSS SECTION**  
 CROSS-SECTION DATA OBTAINED FROM "DESIGN"

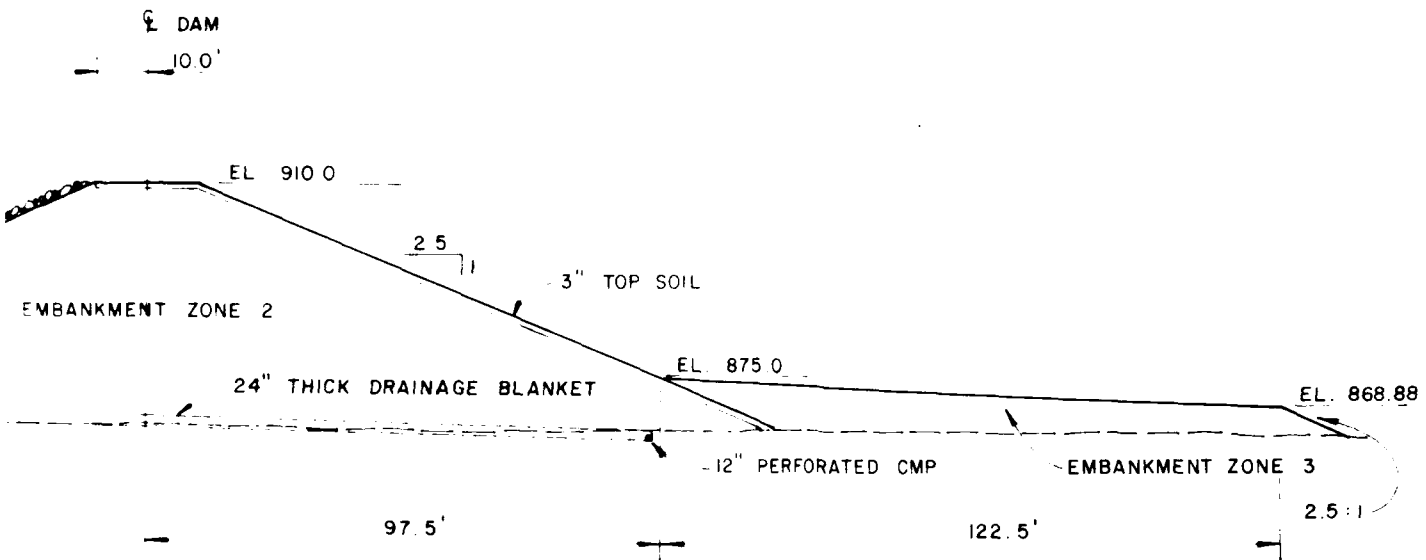


# AL CROSS SECTION


DATA OBTAINED FROM "DESIGN DRAWING"

2


## HARRISONVILLE CITY LAKE TYPICAL CROSS SECTION

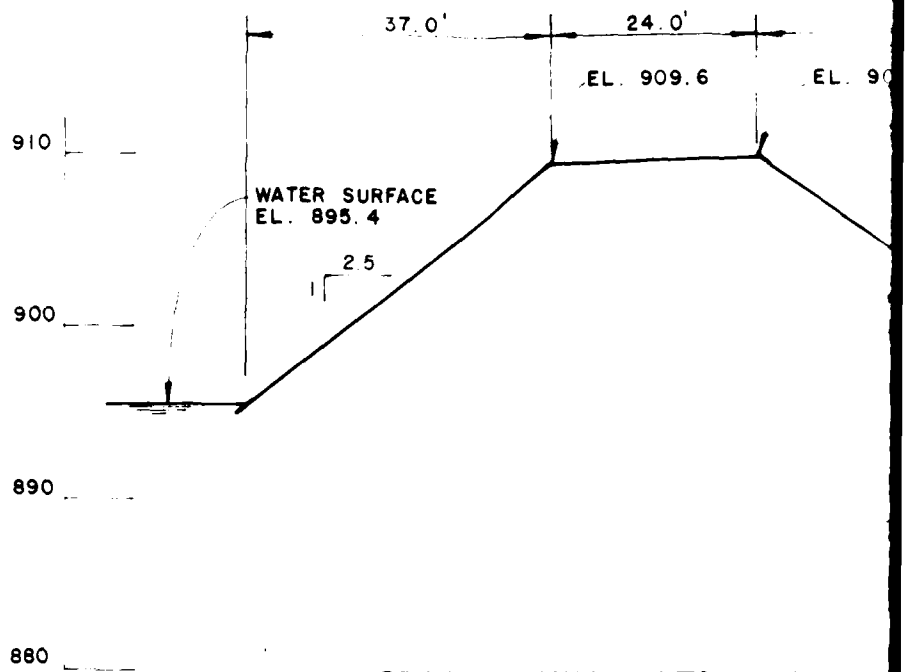


SECTION NEAR STATION 8+

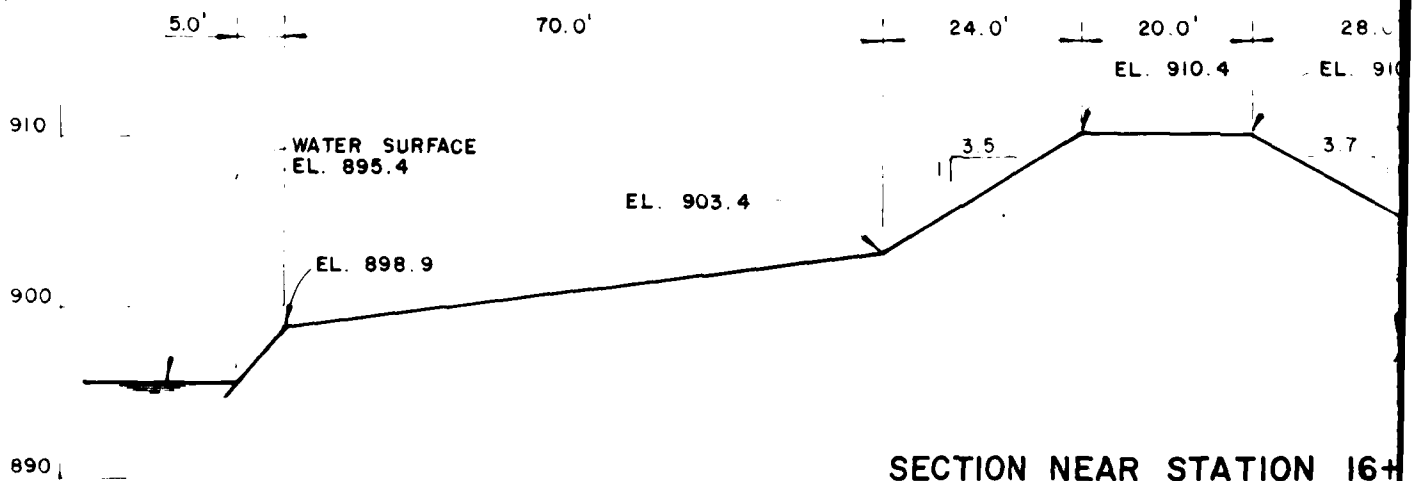

SECTION NEAR STATION 16+

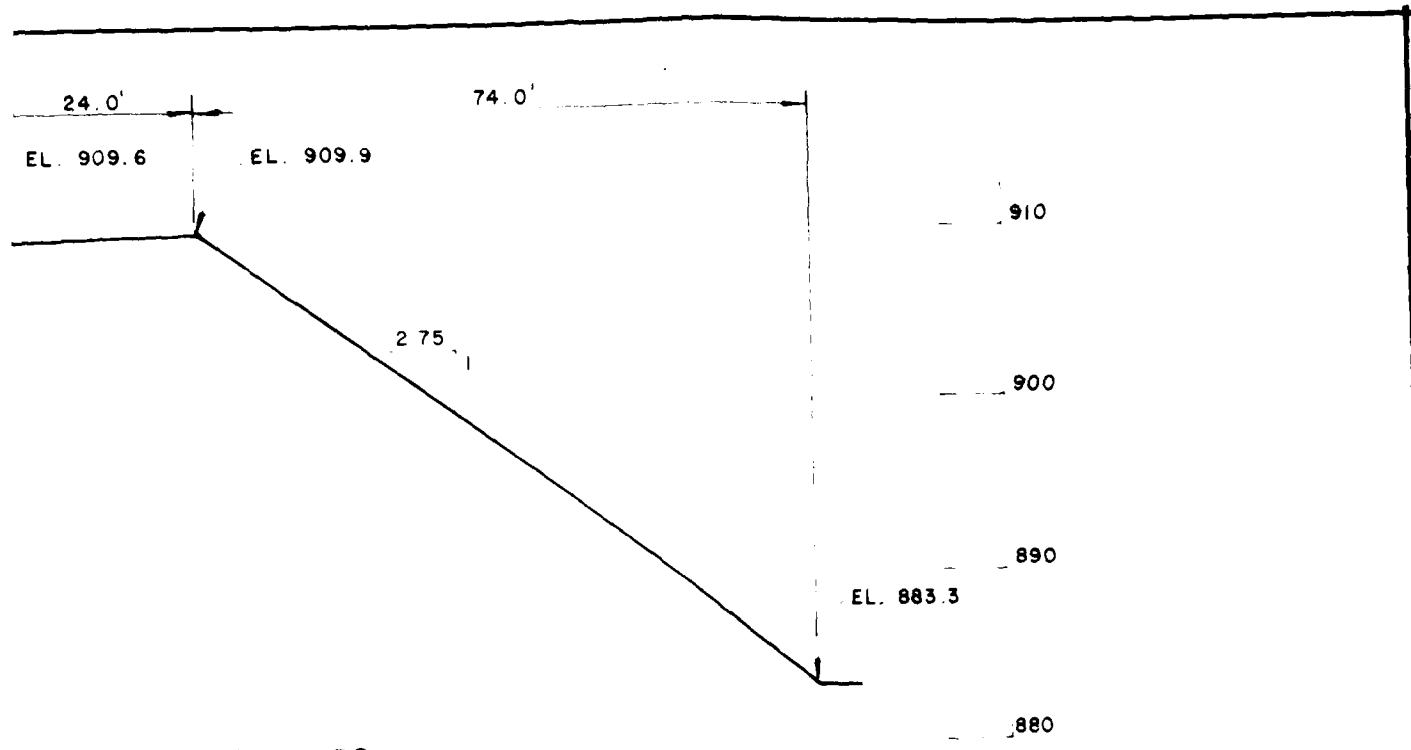


EAR STATION 8+00

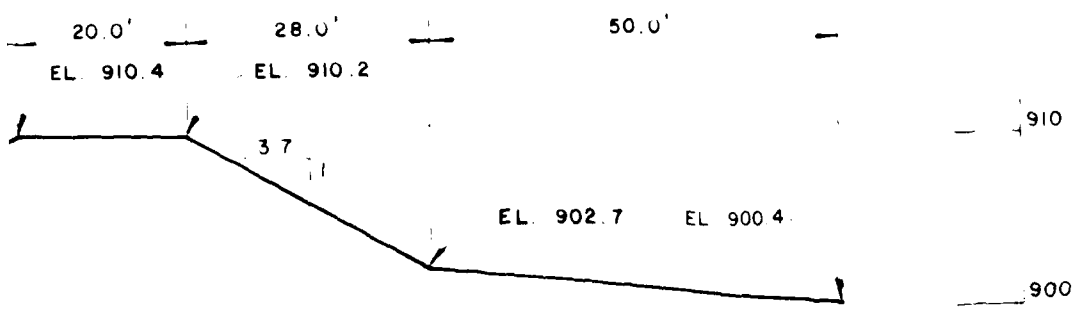


EAR STATION 16+50

2


HARRISONVILLE CITY LAKE  
TYPICAL SECTIONS

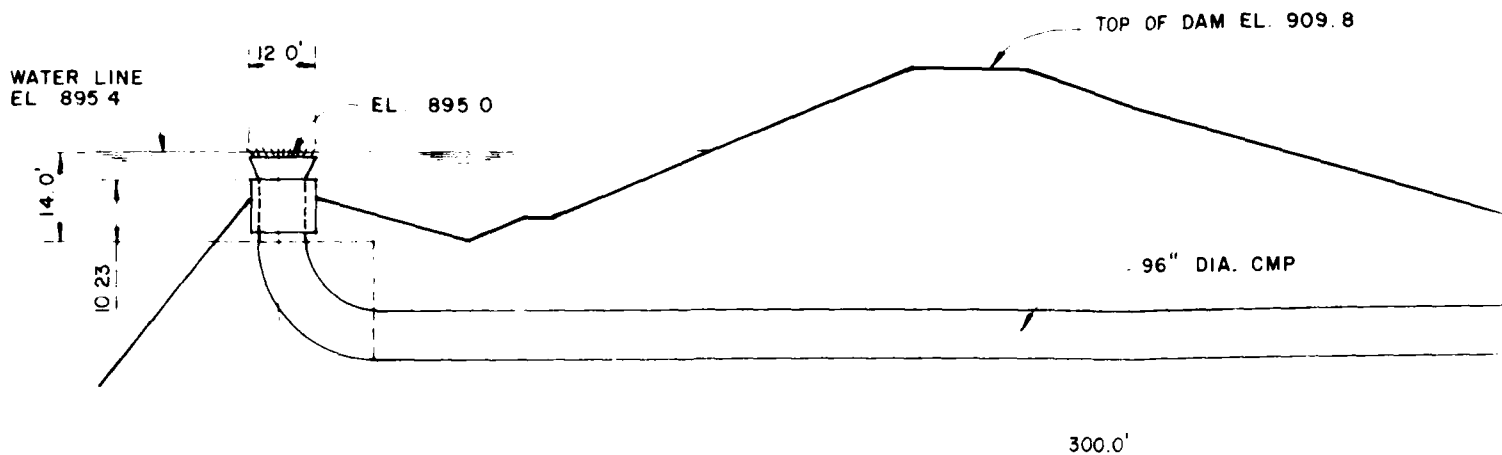

### PRINCIPAL SPILLWAY - MORNING GLORY INLET

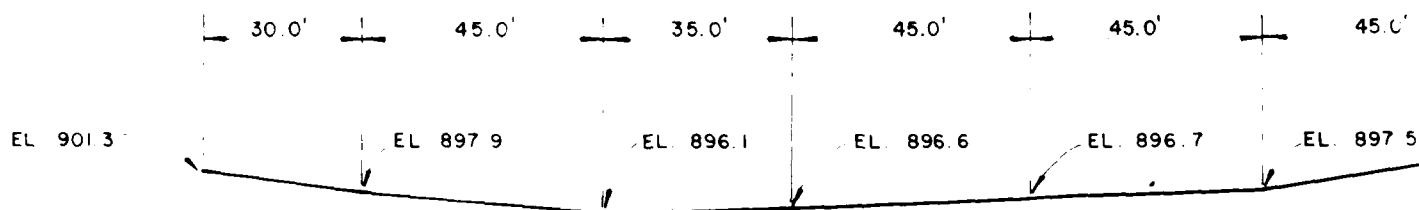

### EMERGENCY SPILLWAY - LOOKING UPSTREAM

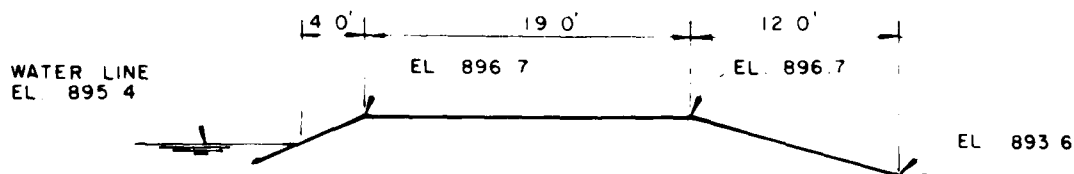

### EMERGENCY SPILLWAY - CREST SECTION

DAM EL 909 8

" DIA. CMP

INVERT EL. 860.0

MORNING GLORY INLET

45.0'

45.0'

EL 896 7

EL 897 5

EL 905 2


UPSTREAM

193 6

2

HARRISONVILLE CITY LAKE  
SPILLWAY SECTIONS


PLATE 6

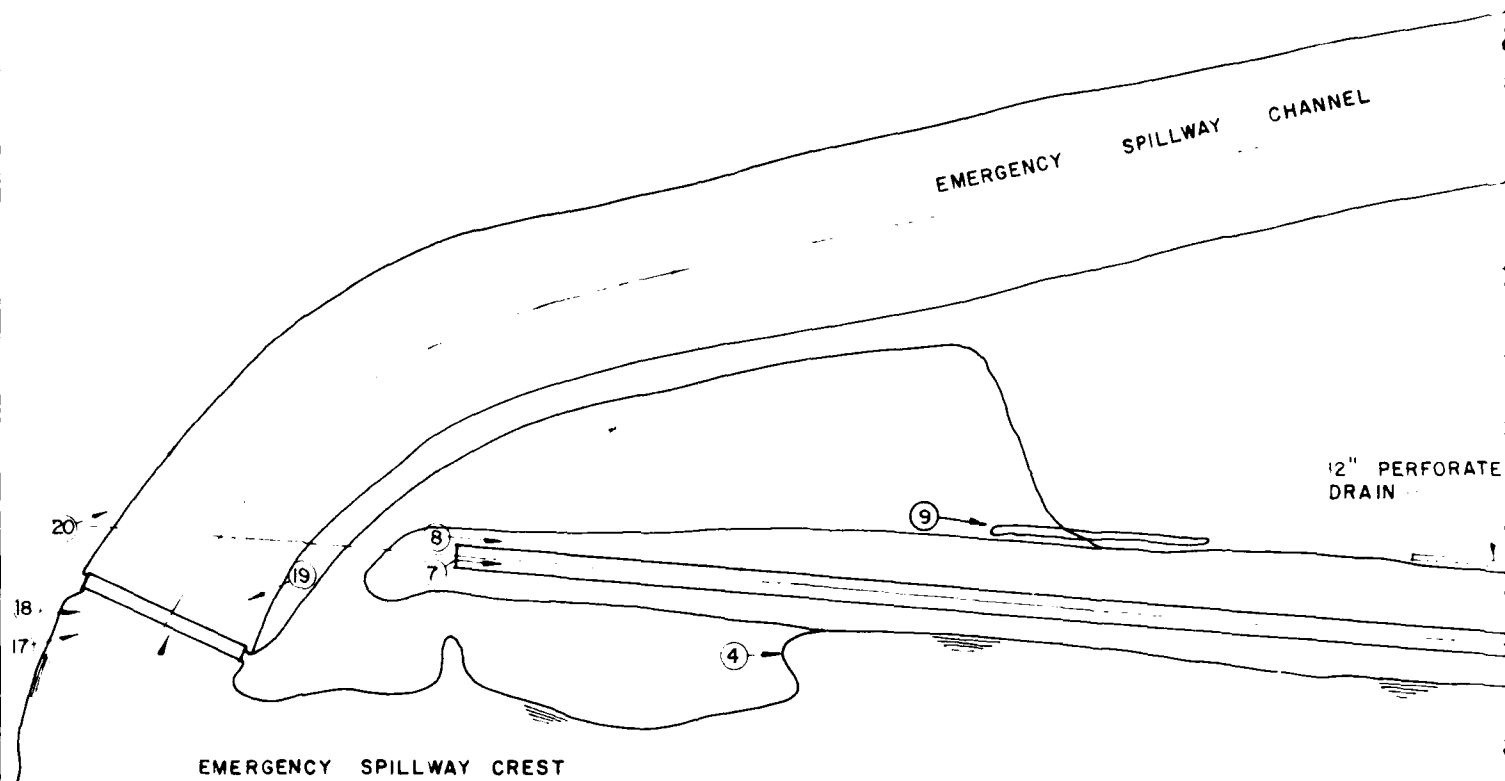

## HARRISONVILLE CITY LAKE

### LEGEND

1) - PHOTO LOCATION AND DIRECTION

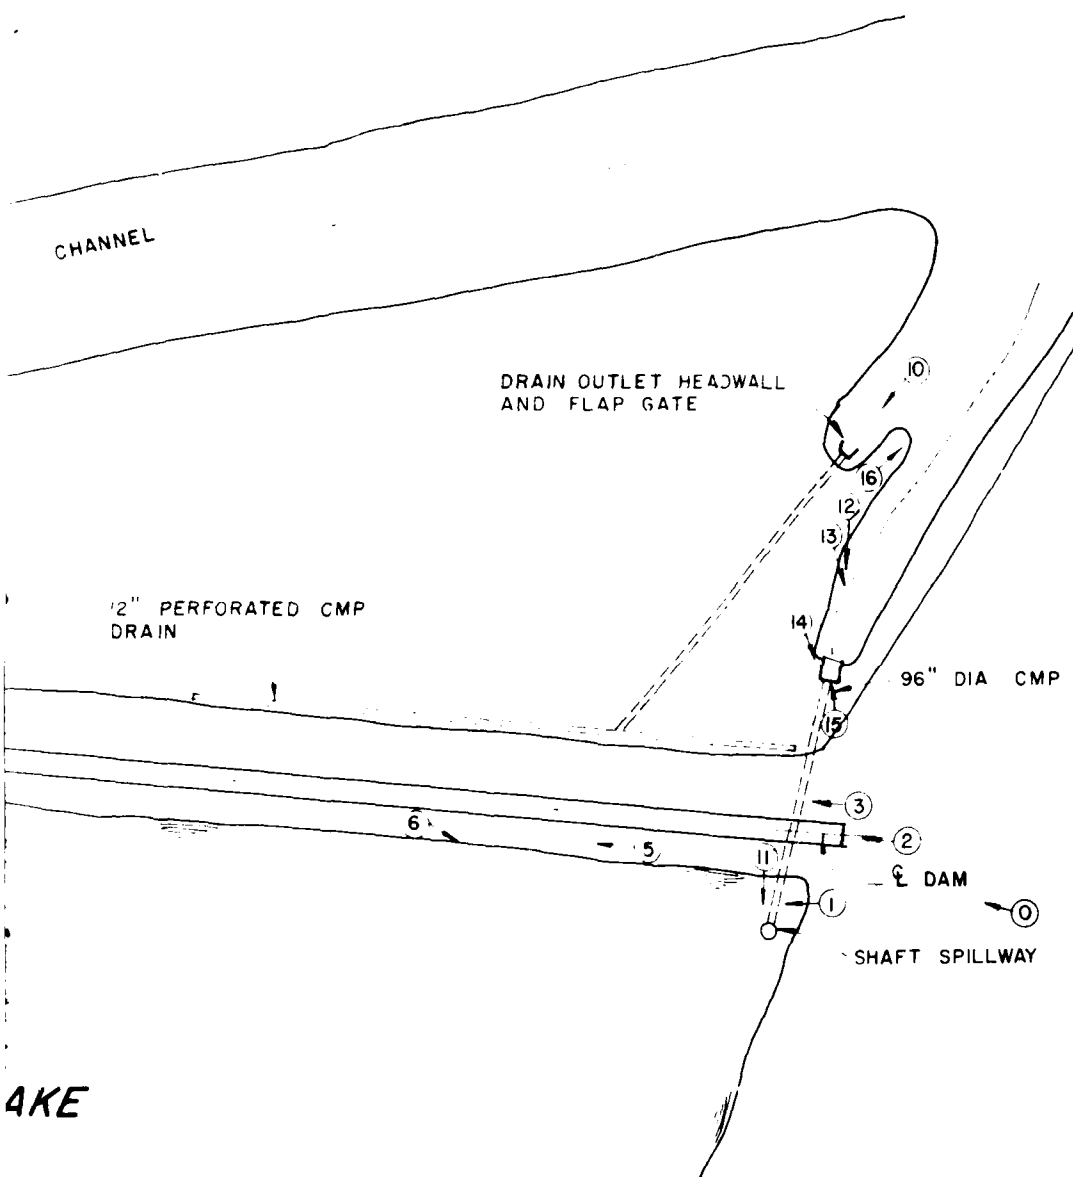

HARRISONVILLE CITY LAKE  
PHOTO INDEX



PHOTO 1: UPSTREAM FACE OF DAM AND SHAFT SPILLWAY (LOOKING NORTH)



PHOTO 2: CREST OF DAM (LOOKING NORTH)



PHOTO 3: DOWNSTREAM FACE OF DAM (LOOKING NORTH)



PHOTO 4: RIPRAP ON UPSTREAM FACE (LOOKING SOUTH)



PHOTO 5: EROSION OF RIPRAP ON UPSTREAM FACE (LOOKING NORTH)



PHOTO 6: EXPOSURE OF EMBANKMENT AND EROSION OF RIPRAP  
ON UPSTREAM FACE



PHOTO 7: CREST OF DAM (LOOKING SOUTH)



PHOTO 8: DOWNSTREAM FACE OF DAM (LOOKING SOUTH)



PHOTO 9: EROSION ALONG TOE OF DAM (LOOKING SOUTH)



PHOTO 10: INTERIOR DRAIN OUTLET WITH FLAP GATE



PHOTO 11: SHAFT SPILLWAY STRUCTURE (LOOKING UPSTREAM)

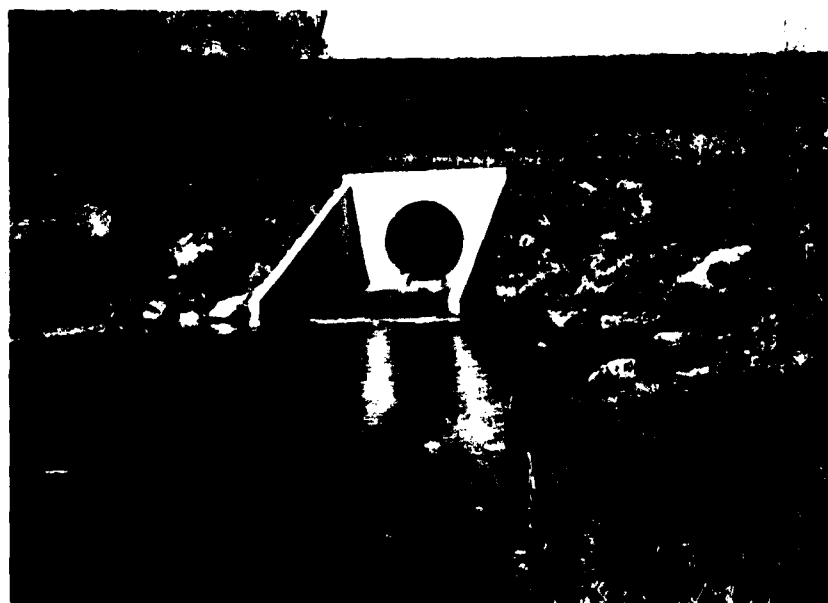


PHOTO 12: SHAFT SPILLWAY DISCHARGE STRUCTURE (LOOKING UPSTREAM)



PHOTO 13: SEEPAGE FROM EMBANKMENT AND SPALLING OF CONCRETE ON WINGWALL



PHOTO 14: EROSION ALONG WINGWALL OF SPILLWAY DISCHARGE STRUCTURE

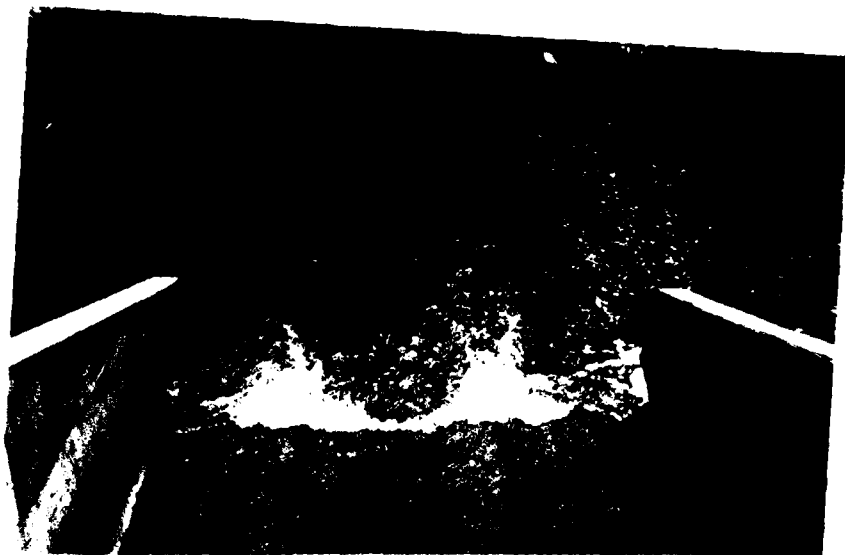


PHOTO 15: SHAFT SPILLWAY DISCHARGE STRUCTURE (LOOKING DOWNSTREAM)



PHOTO 16: SPILLWAY CHANNEL (LOOKING DOWNSTREAM)



PHOTO 17: EMERGENCY SPILLWAY (LOOKING DOWNSTREAM)



PHOTO 18: EMERGENCY SPILLWAY APPROACH



PHOTO 19: EMERGENCY SPILLWAY CREST (LOOKING UPSTREAM)



PHOTO 20: EMERGENCY SPILLWAY DISCHARGE CHANNEL (LOOKING DOWNSTREAM)

APPENDIX A  
HYDROLOGIC COMPUTATIONS

## HYDROLOGIC COMPUTATIONS

1. The Soil Conservation Service (SCS) dimensionless unit hydrograph and HEC-1 (1) were used to develop the inflow hydrographs. Hydrologic inputs are as follows:

a. Forty-eight hour, probable maximum precipitation determined from U.S. Weather Bureau Hydrometeorological Report No. 33.

200 square mile, 24 hour rainfall inches - 25.0

14.79 square mile, 6 hour percent of 24 hour  
200 square mile rainfall - 97%

14.79 square mile, 12 hour percent of 24 hour  
200 square mile rainfall - 116%

14.79 square mile, 24 hour percent of 24 hour  
200 square mile rainfall - 125%

14.79 square mile, 24 hour percent of 24 hour  
200 square mile rainfall - 136%

b. Drainage area = 14.79 square miles = 9,470 acres.

c. Time of concentration:  $T_c = (11.9 \times L^3/H)^{0.385}$ , North Branch = 1.30 hours, West Branch = 0.84 hours, and South Branch = 0.71 hours.

d. Losses were determined in accordance with SCS methods for determining runoff using a curve number of 88 and antecedent moisture condition III. Land usage in the watershed consists of pasture and range (55%), row crops (25%), and woods (20%). The hydrologic soil groups in the basin were B and C, with C being predominant.

2. The principal spillway is a shaft spillway with a morning glory inlet. Spillway discharge rates are based on the weir equation for low heads, and on orifice and pipe flow equations for higher heads.

Weir equation:

$$Q = CLH^{1.5} \quad (C = 2.43 \text{ to } 3.97, L = 1D = 37.7 \text{ feet, } H \text{ is the head on the weir}).$$

Orifice equation:

$$Q = (R/0.204)^2 H_o^{0.5} \quad (R = 4 \text{ feet, } H_o \text{ is the head at the throat of transition}).$$

Full pipe equation:

$$Q = A(2gH_T/K_T)^{0.5} \quad (A = 50.3 \text{ square feet, } H_T \text{ is the total head, } K_T \text{ is the sum of the loss coefficients}).$$

Spillway discharge rates for the emergency spillway are based on the weir equation. The C values were chosen for broad-crested weirs of trapezoidal section:

$$Q = CLH^{1.5} \quad (C = 2.9 \text{ to } 3.3, L = 105 \text{ to } 245 \text{ feet, } H \text{ is the head on the weir})$$

When the water level in the lake exceeds 904 feet, water flows over a berm between the dam and the spillway. Discharge rates over the berm are based on the weir equation:

$$Q = CLH^{1.5} \quad (C = 3.1, L = 180 \text{ feet})$$

Discharge rates over the top of the dam are also based on the weir equation:

$$Q = CLH^{1.5} \quad (C = 3.1, L = 1,900 \text{ feet})$$

3. The elevation-storage relationship above normal pool elevation was constructed by planimetering the area enclosed within each contour above normal pool. The storage between two elevations was computed by multiplying the average of the areas at the two elevations by the elevation difference. The summation of these increments below a given elevation is the storage below that level.

4. Floods are routed through the spillway using HEC-1, modified Puls to determine the capability of the spillway.

- (1) U.S. Army Corps of Engineers, Hydrologic Engineering Center, Flood Hydrograph Package (HEC-1), Dam Safety Version, July 1978, September 1978 Modification, Davis, California.
- (2) U.S. Department of the Interior, Bureau of Reclamation, Design of Small Dams, 1974, Washington, D.C.

FLOOD HYDROGRAPH PACKAGE (HEC-1)  
DAM SAFETY VP N JULY 1978  
LAST MODIF. :ION 25 SEP 78

MISSOURI DAM INSPECTIONS  
PMF ROUTING FOR HARRISONVILLE LAKE  
DRAINAGE AREA = 14.79 SQ. MI.

0000000000

—

—

Year	1950	1955	1960	1965	1970
1950	1.0	.95	.9	.85	.8
1955	1.0	.95	.9	.85	.8
1960	1.0	.95	.9	.85	.8
1965	1.0	.95	.9	.85	.8
1970	1.0	.95	.9	.85	.8

0 NORTH 1 3 1

HARRISONVILLE LAKE 68 HOUR PMF INFLOW HYDROGRAPH - NORTH BRANCH

1500

[illegible]

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25

1.30  
- 3

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

0 1 2 3

HAELSONVILLE. 1345 PMF 145100 HYDROGRAPH - WEST BRANCH

1 25.47 1-

1	25	0	02	116	128	136
2	25	0	02	116	128	136

[illegible]

3

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
84

0 SOUTH

-

HARRISONVILLE LAKE 48 HOUR PMF INFLOW HYDROGRAPH - SOUTH BRANCH

DATE	DESCRIPTION	AMOUNT	BALANCE
1	23-79	1.	

1	25.0	97.	116.	135.	136.
---	------	-----	------	------	------

188-189

6.71

—

3 HEAD 1 1

COMBINE PMF INFLOW HYDROGRAPHS FROM NORTH, WEST, AND SOUTH BRANCHES

1 DAM

ROUTING PROBABLE MAXIMUM FLOOD THROUGH HARRISONVILLE LAKE

1

-895. -1

905. 903. 902. 901. 900. 899. 898. 897. 396. 395.

14910. 911. 915.

150. 137. 506. 1520. 2660. 4160. 5850. 7920. 10240. 16230.

MS42750.56050. 145430.

350. 2325. 8190. 13000.

8E695. 900. 910. 915.

1985.

80909.4  
HARRISON

69

HARRISONVILLE CITY LAKE

TRIBS MODELED SEPARATELY

1. PMF (85% Pass)

- JUNE 14, 1979

“...and I have been thinking about you ever since.”

.....  
 FLOOD MAP PACKAGE (HEC-1)  
 DAN SAFETY DESIGN JULY 1978  
 LAST MODIFICATION 25 SEP 78  
 .....

RUN DATE: 06/14/79.  
 TIME: 19:23:41.

MISSOURI DAM INSPECTIONS  
 PPF ROUTING FOR HARRISONVILLE LAKE  
 DRAINAGE AREA = 14.79 SQ. MI.

JOB SPECIFICATION									
NO	KMR	NMIN	IOAY	IMR	IMIN	METRC	JPLT	IPRT	MSTAW
288	0	10	0	0	0	0	0	0	0
	JOPER	MOT	LROPT	TRACE					
	5	0	0	0					

MULTI-PLAN ANALYSES TO BE PERFORMED  
 NPLAN= 1 NR10= 5 LR10= 1  
 RTIOS= .50 .20 .85 .90 .95 1.00

..... SUB-AREA RUNOFF COMPUTATION .....  
 HARRISONVILLE LAKE 48 HOUR PPF INFLOW HYDROGRAPH - NORTH BRANCH  
 ISTAQ ICOMP IECON ITAPE JPLT JPRT INAVE ISTAGE IAUOTO  
 NORTH 0 0 0 0 1 3 1 0 0

HYDROGRAPH DATA									
INTD	IUNG	TAREA	SNAP	TRSDA	TRSPC	RATIO	ISNOW	ISAME	LOCAL
1	2	5.53	0.00	5.53	1.00	0.000	0	0	0

PRECIP DATA			
SPFE	PMS	R6	R2
0.00	25.00	97.00	116.00

LOSS DATA									
LROPT	STRNR	BLTR	RTIOL	ERAIN	STKRS	RTIOL	STRTL	CNSTL	ALSPH
0	0.00	0.00	1.00	0.00	0.00	1.00	-1.00	-88.00	0.00

CURVE NO = -98.00 NETNESS = -1.00 EFFECT CN = 98.00

UNIT HYDROGRAPH DATA  
 TC= 0.00 LAG= 1.30

RECESSION DATA  
 STRTG= 0.00 GRCSH= 0.00 RTIOR= 1.00

UNIT HYDROGRAPH 41 END OF PERIOD ORIGINATES, TC= 0.00 HOURS, LAG= 1.30 VOL= 1.00									
NO	246	502	552	1282	1632	1845	1924	1914	1789
86	1621	1477	1159	916	745	613	507	422	348
1621	1477	1159	916	745	613	507	422	348	280
234	192	157	129	104	87	72	59	49	40
23	27	22	19	16	13	11	8	6	3
1									

END-OF-PERIOD FLOW

END-OF-PERIOD FLOW									
PO.DA	HR.MN	PERIOD	RAIN	EXCS	LOSS	COMP Q	MO.DA	HR.MN	PERIOD
1	01	1	0.00	0.00	0.00	0.00	1	02	10
1	01	2	0.00	0.00	0.00	0.00	1	02	20
1	01	3	0.00	0.00	0.00	0.00	1	02	30
1	01	4	0.00	0.00	0.00	0.00	1	02	40

PEAK FLOW AND STORAGE (END OF PERIOD) SUMMARY FOR MULTIPLE PLAN-RATIO ECONOMIC COMPUTATIONS  
 FLOWS IN CUBIC FEET PER SECOND (CUBIC METERS PER SECOND)  
 AREA IN SQUARE MILES (SQUARE KILOMETERS)

OPERATION	STATION	AREA	PLAN	RATIOS APPLIED TO FLOWS					
				RATIO 1	RATIO 2	RATIO 3	RATIO 4	RATIO 5	RATIO 6
				.50	.80	.85	.90	.95	1.00
HYDROGRAPH AT	NORTH	5.53 (14.32)	1	11435. (325.22)	18376. (520.34)	19524. (552.87)	20673. (585.29)	21821. (617.91)	22970. (650.43)
HYDROGRAPH AT	WEST	5.47 (14.17)	1	13935. (394.61)	22297. (631.38)	23690. (670.84)	25084. (710.30)	26478. (749.76)	27871. (789.22)
HYDROGRAPH AT	SOUTH	3.79 (9.82)	1	10495. (297.22)	16764. (475.55)	17844. (505.28)	18893. (535.00)	19943. (564.72)	20993. (594.44)
3 COMBINED	HEAD	14.79 (38.31)	1	34380. (973.54)	55009. (1557.67)	58447. (1655.03)	61885. (1752.38)	65323. (1849.73)	68761. (1947.09)
ROUTED TO	DAM	14.79 (38.31)	1	19995. (566.24)	36987. (1047.35)	39652. (1122.82)	42302. (1197.85)	45629. (1292.07)	48926. (1385.42)

# SUMMARY OF DAM SAFETY ANALYSIS

PLAN 1 .....

RATIO OF PMF	ELEVATION STORAGE OUTFLOW	INITIAL VALUE 895.00 0. 0.	SPILLWAY CREST 895.00 0. 0.	TOP OF DAM 909.40 7838. 39744.	DURATION OVER TOP HOURS	MAXIMUM OUTFLOW CFS	MAXIMUM STORAGE AC-FT	MAXIMUM DEPTH OVER DAM	TIME OF MAX OUTFLOW HOURS	TIME OF FAILURE HOURS
.50	905.70	0.00	0.00	0.00	0.00	19996.	5671.	0.00	41.67	0.00
.80	908.83	0.00	0.00	0.00	0.00	36987.	7536.	0.00	41.50	0.00
.85	909.28	0.00	0.00	0.00	0.00	39652.	7628.	0.00	41.33	0.00
.90	909.88	.48	.48	1.17	1.17	42302.	8119.	1.17	41.33	0.00
.95	910.20	.80	.80	1.67	1.67	45629.	8387.	1.67	41.33	0.00
1.00	910.46	1.06	1.06	2.00	2.00	48926.	8629.	2.00	41.33	0.00

END

DATE  
FILMED

11-81

DTIC